



2019

TIRE DATA GUIDE

DELINTE 
WE INVENT. YOU DRIVE.

LIMITED TIRE WARRANTY

SUMMARY OF LIMITED TIRE WARRANTY COVERAGE BY DELINTE TREAD PATTERN



Effective July 1, 2017
For Full Details Visit:
DelinteTires.com/Warranty

Pattern	Road Hazard	Mileage Warranty
DH2	Yes	50,000
D7	Yes	40,000
D8+	Yes	30,000
DS8	Yes	50,000
DH7	Yes	50,000
DX9	No	N/A
DX10	Yes*	50,000
DX11	Yes*	50,000
DX12	No	N/A
DV2	N/A	N/A
AW5	Yes	30,000
AW5 Van	N/A	N/A

Warranty or Road Hazard Claims MUST be processed directly with the Delinte Tire Retailer where the replacement tires were purchased (including internet retailers). Warranty claims will not be processed through the manufacturer.

Warranty coverage is for indicated Delinte tread patterns only.

NOTE: No coverage for WD42/WD52 (Winter Tires) or commercial use.

*Limited Applications. No coverage for commercial use.

Warranty and Road Hazard Protection program does not apply to tires sold in Canada and Mexico.

	PG	
DH2	4	All Season Performance Touring Tire
D7	6	All Season Ultra High Performance Tire
D8+	8	All Season Performance Crossover & Sport Utility Tire
DH7	10	All Season Highway Crossover & SUV Tire
DS8 DESERT STORM II	12	All Season Ultra High Performance Tire
DX9 BANDIT M/T	14	Mud-Terrain Tire
DX10 BANDIT A/T	16	All-Terrain Tire
DX11 BANDIT H/T	18	Highway-Terrain Tire
DX12 BANDIT R/T	20	Rough-Terrain Tire
DV2	22	Commercial Van Tire
AW5	24	All Weather Passenger Car Radial Tire
AW5 VAN	26	All Weather Radial Tire

It's smart to look for new ideas, new technology and new value in high performance tires. That's why a growing number of drivers worldwide are looking to Delinte. Engineered and produced under the leadership of a European technology team, Delinte tires provide the satisfying performance and aggressive styling today's most progressive drivers demand.

DELINTE
WE INVENT. YOU DRIVE.



A HIGHER MILEAGE TIRE **WITH A SENSE OF STYLE.**

With its ultra-wear-resistant tread compound, large pattern interior tread blocks, and heat-releasing shoulder design, the DH2 is engineered to go the distance — quietly, stylishly and with a great wet-road grip that keeps you stable in the rain.

DH2
TIRE DATA

FEATURES & BENEFITS

ASYMMETRIC PATTERN DESIGN

Our asymmetric 5-pitch tread pattern is designed to blend the requirements of dry grip and water dispersal, giving the driver a larger contact area and consistent wear for longer tire life. Larger tread ribs/blocks on the outside increase cornering stability while smaller inner blocks aid in dissipating water.

FOUR-WIDE LONGITUDINAL GROOVES

The grooves evacuate water and enhance longitudinal traction to prevent lateral slide, improving wet driving performance.

WEAR-RESISTANT SHOULDER DESIGN

Integrated heat-resisting bars in the shoulder reduce irregular tread wear and dampen wind noise. This highly stable shoulder profile also pays off in great high-speed cornering.

3D SHOULDER GROOVES

Reduce road noise for a quiet and comfortable ride.



For Full Details Visit:
[DelinteTires.com/
Warranty](https://DelinteTires.com/Warranty)

Bold Designates
measuring rim width.

This data can be changed
by manufacturer without
prior notice.

Wheel Diameter	Size	LS	Rim Width	Tread Depth (1/32")	Tread Depth (mm)	Diameter (inch)	Diameter (mm)	Section Width (inch)	Section Width (mm)	Max Load (lbs)	Max Load (kg)	Max Pressure (psi)	Max Pressure (kPa)	RPM	Weight (lbs)
13	165/65R13	77T	4.5-5.0-6.0	9.2	7.3	21.4	544	6.7	170	908	412	44	300	970	13.43
	165/65R13	77H	4.5-5.0-6.0	9.2	7.3	21.4	544	6.7	170	908	412	44	300	970	13.43
	165/70R13	79T	4.0-5.0-5.5	9.2	7.3	22.1	562	6.7	170	963	437	44	300	939	13.78
	175/70R13	82T	4.5-5.0-6.0	9.2	7.3	22.7	576	7.0	177	1047	475	44	300	916	15.21
	165/60R14	75T	4.5-5.0-6.0	9.6	7.6	21.8	554	6.7	170	853	387	44	300	952	13.84
	165/65R14	79H	4.5-5.0-6.0	9.3	7.4	22.4	570	6.7	170	963	437	44	300	926	14.12
	165/65R14	79T	4.5-5.0-6.0	9.3	7.4	22.4	570	6.7	170	963	437	44	300	926	14.12
	165/70R14	81T	4.0-5.0-5.5	9.3	7.4	23.1	588	6.7	170	1019	462	44	300	897	14.64
	175/60R14	79T	5.0-5.5-6.0	9.3	7.4	22.3	566	7.0	177	963	437	44	300	932	14.53
	175/65R14	82T	5.0-5.5-6.0	9.3	7.4	23.0	584	7.0	177	1047	475	44	300	903	15.00
	175/65R14	82H	5.0-5.5-6.0	9.3	7.4	23.0	584	7.0	177	1047	475	44	300	903	15.00
	175/70R14	88H	5.0-5.5-6.0	9.3	7.4	23.7	602	7.0	177	1235	560	49	340	876	15.86
	175/70R14	88T XL	5.0-5.5-6.0	9.3	7.4	23.7	602	7.0	177	1235	560	49	340	876	15.86
14	185/60R14	82H	5.0-5.5-6.5	9.3	7.4	22.8	578	7.4	189	1047	475	44	300	913	15.79
	185/65R14	86T	5.0-5.5-6.5	9.3	7.4	23.5	596	7.4	189	1168	530	44	300	885	16.02
	185/65R14	86H	5.0-5.5-6.5	9.3	7.4	23.5	596	7.4	189	1168	530	44	300	885	16.02
	185/70R14	88T	4.5-5.5-6.0	9.3	7.4	24.3	616	7.4	189	1235	560	44	300	856	16.69
	185/70R14	88H	4.5-5.5-6.0	9.3	7.4	24.3	616	7.4	189	1235	560	44	300	856	16.69
	195/60R14	86H	5.5-6.0-7.0	9.3	7.4	23.2	590	7.9	201	1168	530	44	300	894	16.09
	195/70R14	91T	5.0-6.0-6.5	9.3	7.4	24.8	630	7.9	201	1356	615	44	300	837	18.77
	195/70R14	91H	5.0-6.0-6.5	9.3	7.4	24.8	630	7.9	201	1356	615	44	300	837	18.77
	175/65R15	84T	5.0-5.5-6.0	9.6	7.6	24.0	609	7.0	177	1102	500	44	300	866	16.54
	175/65R15	84H	5.0-5.5-6.0	9.6	7.6	24.0	609	7.0	177	1102	500	44	300	866	16.54
	185/60R15	84H	5.0-5.5-6.5	9.6	7.6	23.7	603	7.4	189	1102	500	44	300	875	17.10
	185/65R15	88H	5.0-5.5-6.5	9.6	7.6	24.4	621	7.4	189	1235	560	44	300	850	17.64
	185/65R15	88T	5.0-5.5-6.5	9.6	7.6	24.4	621	7.4	189	1235	560	44	300	850	17.64
15	195/50R15	82V	5.5-6.0-7.0	9.6	7.6	22.7	577	7.9	201	1047	475	44	300	914	17.28
	195/55R15	85V	5.5-6.0-7.0	9.6	7.6	23.4	595	7.9	201	1135	515	44	300	887	17.99
	195/60R15	88H	5.5-6.0-7.0	9.6	7.6	24.2	615	7.9	201	1235	560	44	300	858	18.25
	195/60R15	88V	5.5-6.0-7.0	9.6	7.6	24.2	615	7.9	201	1235	560	44	300	858	18.25
	195/65R15	91H	5.5-6.0-7.0	9.6	7.6	25.0	635	7.9	201	1356	615	44	300	831	19.03
	195/65R15	91V	5.5-6.0-7.0	9.6	7.6	25.0	635	7.9	201	1356	615	44	300	831	19.03
	195/65R15	95 H XL	5.5-6.0-7.0	9.6	7.6	25.0	635	7.9	201	1521	690	49	340	831	19.03
	205/60R15	91V	5.5-6.0-7.0	9.6	7.6	24.7	627	8.2	209	1356	615	44	300	841	19.75
	205/65R15	94H	5.5-6.0-7.5	9.6	7.6	25.5	647	8.2	209	1477	670	44	300	815	20.83
	215/70R15	98H	5.5-6.5-7.0	9.6	7.6	26.9	683	8.7	221	1653	750	44	300	772	23.19
	195/55ZR16	87W	5.5-6.0-7.0	9.6	7.6	24.4	620	7.9	201	1201	545	44	300	851	19.04
	205/50ZR16	87W	5.5-6.5-7.5	9.6	7.6	24.1	612	8.4	214	1201	545	44	300	862	19.26
	205/55ZR16	91W	5.5-6.5-7.5	9.6	7.6	24.9	632	8.4	214	1356	615	44	300	835	20.19
205/55ZR16	94W XL	5.5-6.5-7.5	9.6	7.6	24.9	632	8.4	214	1477	670	49	340	835	20.19	
16	205/60R16	92H	5.5-6.0-7.5	9.6	7.6	25.7	652	8.2	209	1389	630	44	300	809	20.06
	205/60R16	92V	5.5-6.0-7.5	9.6	7.6	25.7	652	8.2	209	1389	630	44	300	809	20.06
	205/65R16	99H	5.5-6.0-7.5	9.6	7.6	26.5	672	8.2	209	1709	775	49	340	785	21.45
	205/65R16	95H	5.5-6.0-7.5	9.6	7.6	26.5	672	8.2	209	1521	690	44	300	785	21.45
	205/70R16	98H	5.0-6.0-7.0	9.6	7.6	27.3	694	8.2	209	1653	750	49	340	760	24.43
	215/55ZR16	97W XL	6.0-7.0-7.5	9.6	7.6	25.3	642	8.9	226	1609	730	49	340	822	21.37
	215/60R16	95H	6.0-6.5-7.5	9.6	7.6	26.1	664	8.7	221	1709	775	49	340	794	#N/A
	215/60R16	95V	6.0-6.5-7.5	9.6	7.6	26.1	664	8.7	221	1709	775	49	340	794	22.33
	215/60R16	99H	6.0-6.5-7.5	9.6	7.6	26.1	664	8.7	221	1709	775	49	340	794	22.33
	215/60R16	99V	6.0-6.5-7.5	9.6	7.6	26.1	664	8.7	221	1709	775	49	340	794	22.33
	215/65R16	102H XL	6.0-6.5-7.5	9.6	7.6	27.0	686	8.7	221	1874	850	49	340	769	23.25
	215/70R16	100H	5.5-6.5-7.0	9.6	7.6	27.9	708	8.7	221	1764	800	44	300	745	24.43
	225/55ZR16	99W XL	6.0-7.0-8.0	9.6	7.6	25.7	654	9.2	233	1709	775	49	340	807	23.13
225/60R16	98H	6.0-6.5-8.0	9.6	7.6	26.6	676	9.0	228	1653	750	44	300	780	23.73	
225/65R16	100H	6.0-6.5-8.0	9.6	7.6	27.5	698	9.0	228	1764	800	44	300	756	23.24	
17	205/40ZR17	84W XL	7.0-7.5-8.0	9.6	7.6	23.5	596	8.3	212	1102	500	49	340	885	18.17
	205/50ZR17	93W	5.5-6.5-7.5	9.6	7.6	25.1	638	8.4	214	1433	650	49	340	827	20.56
	215/45ZR17	91W XL	7.0-7.5-8.0	9.6	7.6	24.6	626	8.4	213	1356	615	49	340	843	19.99
	215/50ZR17	95W XL	6.0-7.0-7.5	9.6	7.6	25.5	648	8.9	226	1521	690	49	340	814	21.82
	215/55ZR17	94W	6.0-7.0-7.5	9.6	7.6	26.3	668	8.9	226	1477	670	44	300	790	22.92
	215/55ZR17	98W XL	6.0-7.0-7.5	9.6	7.6	26.3	668	8.9	226	1653	750	49	340	790	22.92
	215/60R17	100H XL	6.0-6.5-7.5	9.6	7.6	27.2	690	8.7	221	1764	800	49	340	765	24.81
	215/60R17	100V XL	6.0-6.5-7.5	9.6	7.6	27.2	690	8.7	221	1764	800	49	340	765	24.81
	225/45ZR17	94W XL	7.0-7.5-8.5	9.6	7.6	25.0	634	8.9	225	1477	670	49	340	832	21.00
	225/50ZR17	98W XL	6.0-7.0-8.0	9.6	7.6	25.9	658	9.2	233	1653	750	49	340	802	23.20
	225/55ZR17	101W XL	6.0-7.0-8.0	9.6	7.6	26.8	680	9.2	233	1819	825	49	340	776	25.46
	235/45ZR17	97W XL	7.5-8.0-9.0	9.6	7.6	25.4	644	9.3	236	1609	730	49	340	819	23.24
	235/60R17	105H XL	6.5-7.0-8.5	9.8	7.8	28.1	714	9.4	240	2039	925	49	340	739	28.71
245/40ZR17	95W XL	8.0-8.5-9.5	9.6	7.6	24.7	628	9.8	248	1521	690	49	340	840	22.77	
18	245/45ZR17	99W XL	7.5-8.0-9.0	9.6	7.6	25.7	652	9.6	243	1709	775	49	340	809	24.97
	215/35ZR18	84W XL	7.0-7.5-8.5	9.6	7.6	23.9	607	8.6	218	1102	500	49	340	869	18.66
	215/40ZR18	89W XL	7.0-7.5-8.5	9.6	7.6	24.8	629	8.6	218	1279	580	49	340	839	20.05
	225/40ZR18	92W XL	7.5-8.0-9.0	9.6	7.6	25.1	637	9.1	230	1389	630	49	340	828	21.08
	225/45ZR18	95W XL	7.0-7.5-8.5	9.6	7.6	25.9	659	8.9	225	1521	690	49	340	801	21.76
	225/50ZR18	99W XL	6.0-7.0-8.0	9.6	7.6	26.9	683	9.2	233	1709	775	49	340	772	25.15
	225/55ZR18	102W XL	6.0-7.0-8.0	9.6	7.6	27.8	705	9.2	233	1874	850	49	340	748	26.32
	225/60R18	100H XL	6.0-6.5-8.0	9.6	7.6	28.6	727	9.0	228	1764	800	49	340	726	27.07
	235/40ZR18	95W XL	8.0-8.5-9.5	9.6	7.6	25.4	645	9.5	241	1521	690	49	340	818	22.78
	235/45ZR18	98W XL	7.5-8.0-9.0	9.6	7.6	26.3	669	9.3	236	1653	750	49	340	789	24.52
	235/50ZR18	101W XL	6.5-7.5-8.5	9.6	7.6	27.3	693	9.6	245	1819	825	49	340	761	26.62
	235/55ZR18	104W XL	6.5-7.5-8.5	9.6											



THE D7 SATISFIES THE NEED FOR SPEED...
AND THE CRAVING FOR QUIET.

The D7 is V, H, W and Y speed-rated, so expect high-performance handling! But you can also expect a comfortably quiet ride, too. Roll down the windows and enjoy!

D7
TIRE DATA

FEATURES & BENEFITS

PERFORMANCE-ENHANCING SILICA COMPOUND AND TREAD DESIGN

The D7's advanced high traction compound is tuned for performance, as is the blaze-shaped tread pattern. Expect great traction, superb fuel economy and a comfortable ride.

WET GRIP GROOVES

The four wide longitudinal grooves evacuate road water and resist hydroplaning.

NOISE ABSORBING GROOVE DESIGN

Groove shape and the scores on the groove sides absorb vibration and reduce airflow noise.



For Full Details Visit:
DelinteTires.com/
Warranty

Bold Designates
measuring rim width.

This data can be changed
by manufacturer without
prior notice.

Wheel Diameter	Size	LS	Rim Width	Tread Depth (1/32")	Tread Depth (mm)	Diameter (inch)	Diameter (mm)	Section Width (inch)	Section Width (mm)	Max Load (lbs)	Max Load (kg)	Max Pressure (psi)	Max Pressure (kPa)	RPM	Weight (lbs)
17	205/40ZR17	84W XL	7.0- 7.5 -8.0	9.8	7.8	23.5	596	8.3	212	1102	500	49	340	885	18.17
	205/45ZR17	88W XL	6.5- 7.0 -7.5	9.8	7.8	24.3	616	8.1	206	1235	560	49	340	856	19.14
	205/50ZR17	93W XL	5.5- 6.5 -7.5	9.8	7.8	25.1	638	8.4	214	1433	650	49	340	827	20.56
	215/45ZR17	91W XL	7.0 -8.0	9.8	7.8	24.6	626	8.4	213	1356	615	49	340	843	19.99
	215/55ZR17	94W	6.0- 7.0 -7.5	9.8	7.8	26.3	668	8.9	226	1477	670	44	300	790	22.92
	225/45R17	94W	7.0- 7.5 -8.5	9.8	7.8	25.0	634	8.9	225	1477	670	49	340	832	21.00
	225/45ZR17	94WXL	7.0- 7.5 -8.5	9.8	7.8	25.0	634	8.9	225	1477	670	49	340	832	21.00
	225/50ZR17	98W	6.0- 7.0 -8.0	9.8	7.8	25.9	658	9.2	233	1653	750	49	340	802	23.20
	225/55ZR17	101W XL	6.0- 7.0 -8.0	9.8	7.8	26.8	680	9.2	233	1819	825	49	340	776	25.46
	235/45ZR17	97W XL	7.5- 8.0 -9.0	9.8	7.8	25.4	644	9.3	236	1609	730	49	340	819	23.24
	235/55ZR17	103W XL	6.5- 7.5 -8.5	9.8	7.8	27.2	690	9.6	245	1929	875	49	340	765	26.37
	245/40ZR17	95W XL	8.0- 8.5 -9.5	9.8	7.8	24.7	628	9.8	248	1521	690	49	340	840	22.77
	245/45ZR17	99W XL	7.5- 8.0 -9.0	9.8	7.8	25.7	652	9.6	243	1709	775	49	340	809	24.97
18	215/35ZR18	84W XL	7.0- 7.5 -8.5	9.8	7.8	23.9	607	8.6	218	1102	500	49	340	869	18.66
	215/40ZR18	89W XL	7.0- 7.5 -8.5	9.8	7.8	24.8	629	8.6	218	1279	580	49	340	839	20.05
	225/40ZR18	92WXL	7.5- 8.0 -9.0	9.8	7.8	25.1	637	9.1	230	1389	630	49	340	828	21.08
	225/45ZR18	95WXL	7.0- 7.5 -8.5	9.8	7.8	25.9	659	8.9	225	1521	690	49	340	801	21.76
	235/40ZR18	95W XL	8.0- 8.5 -9.5	9.8	7.8	25.4	645	9.5	241	1521	690	49	340	818	22.78
	235/50ZR18	101W XL	6.5- 7.5 -8.5	9.8	7.8	27.3	693	9.6	245	1819	825	49	340	761	26.62
	235/55ZR18	104V XL	6.5- 7.5 -8.5	9.8	7.8	28.1	715	9.6	245	1984	900	49	340	738	27.80
	245/40ZR18	97W/XL	8.0- 8.5 -9.5	9.8	7.8	25.7	653	9.8	248	1609	730	49	340	808	24.36
	245/45ZR18	100Y XL	7.5- 8.0 -9.0	9.8	7.8	26.7	677	9.6	243	1764	800	49	340	779	25.98
	255/35ZR18	94W XL	8.5- 9.0 -10.0	9.8	7.8	25.0	635	10.2	260	1477	670	49	340	831	24.18
	255/40ZR18	99W XL	8.5- 9.0 -10.0	9.8	7.8	26.0	661	10.2	260	1709	775	49	340	798	26.37
	215/35ZR19	85W XL	7.0- 7.5 -8.5	9.8	7.8	24.9	633	8.6	218	1135	515	49	340	833	20.15
19	225/35ZR19	88W XL	7.5- 8.0 -9.0	9.8	7.8	25.2	641	9.1	230	1235	560	49	340	823	21.12
	225/40ZR19	93W XL	7.5- 8.0 -9.0	9.8	7.8	26.1	663	9.1	230	1433	650	49	340	796	22.51
	225/45ZR19	96W XL	7.0- 7.5 -8.5	9.8	7.8	27.0	685	8.9	225	1565	710	49	340	770	24.14
	235/35ZR19	91W XL	8.0- 8.5 -9.5	9.8	7.8	25.5	647	9.5	241	1356	615	49	340	815	22.07
	245/35R19	93W	8.0- 8.5 -9.5	9.8	7.8	25.8	655	9.8	248	1609	730	49	340	805	23.81
	245/35ZR19	97W XL	8.0- 8.5 -9.5	9.8	7.8	25.8	655	9.8	248	1609	730	49	340	805	23.81
	245/40ZR19	98W XL	8.0- 8.5 -9.5	9.8	7.8	26.7	679	9.8	248	1653	750	49	340	777	25.57
	245/45ZR19	98Y XL	7.5- 8.0 -9.0	9.8	7.8	27.7	703	9.6	243	1653	750	44	300	750	25.88
	255/35ZR19	96W XL	8.5- 9.0 -10.0	9.8	7.8	26.0	661	10.2	260	1565	710	49	340	798	25.42
	265/30ZR19	93W XL	9.0- 9.5 -10.0	9.8	7.8	25.3	643	10.7	271	1433	650	49	340	820	23.37
	275/30ZR19	96W XL	9.0- 9.5 -10.0	9.8	7.8	25.6	649	10.9	278	1565	710	49	340	813	26.04
	275/35ZR19	100W XL	9.0- 9.5 -11.0	9.8	7.8	26.6	675	10.9	278	1764	800	49	340	782	27.38
20	225/30ZR20	85W XL	8.0	9.8	7.8	25.4	644	9.1	230	1135	515	49	340	819	20.13
	225/35ZR20	93W XL	7.5- 8.0 -9.0	9.8	7.8	26.2	666	9.1	230	1433	650	49	340	792	21.91
	235/35ZR20	92W XL	8.0- 8.5 -9.5	9.8	7.8	26.5	672	9.5	241	1389	630	49	340	785	23.68
	245/30ZR20	97W XL	8.0- 8.5 -9.0	9.8	7.8	25.8	656	9.8	248	1609	730	49	340	804	24.16
	245/35ZR20	95W XL	8.0- 8.5 -9.5	9.8	7.8	26.8	680	9.8	248	1521	690	49	340	776	24.74
	245/40ZR20	99W XL	8.0- 8.5 -9.5	9.8	7.8	27.7	704	9.8	248	1709	775	49	340	749	25.84
	255/30ZR20	92W XL	8.5- 9.0 -9.5	9.8	7.8	26.1	662	10.2	260	1389	630	49	340	797	24.10
	255/35ZR20	97W/XL	8.5- 9.0 -10.0	9.8	7.8	27.0	686	10.2	260	1609	730	49	340	769	25.67
	255/45ZR20	105W XL	8.0- 8.5 -9.5	9.8	7.8	29.1	738	10.0	255	2039	925	49	340	715	30.05
	275/30ZR20	97W XL	9.0- 9.5 -10.0	9.8	7.8	26.5	674	10.9	278	1609	730	49	340	783	27.74
	275/35ZR20	102W XL	9.0- 9.5 -11.0	9.8	7.8	27.6	700	10.9	278	1874	850	49	340	754	29.28
	285/30ZR20	99W XL	9.5- 10.0 -10.5	9.8	7.8	26.8	680	11.4	290	1709	775	49	340	776	28.37
22	305/25ZR20	97W XL	10.5- 11.0 -11.5	9.8	7.8	26.0	660	12.3	313	1609	730	49	340	799	27.80
	225/30ZR22	89W XL	8.0	9.8	7.8	26.6	676	9.1	230	1279	580	49	340	780	25.11
	235/30R22	90W	8.5	9.8	7.8	27.6	701	9.5	241	1323	600	49	340	753	24.87
	235/30ZR22	90W XL	8.5	9.8	7.8	27.6	701	9.5	241	1323	600	49	340	753	24.87
	245/30ZR22	95W XL	8.0- 8.5 -9.0	9.8	7.8	27.8	707	9.8	248	1521	690	49	340	746	25.93
	255/30ZR22	95Y XL	8.5- 9.0 -9.5	9.8	7.8	28.1	713	10.2	260	1521	690	49	340	740	27.65
	265/30ZR22	97W XL	9.0- 9.5 -10.0	9.8	7.8	28.3	719	10.7	271	1609	730	49	340	734	28.88
	285/25ZR22	95W XL	10.5	9.8	7.8	27.6	701	11.6	295	1521	690	49	340	753	30.49
	305/25ZR22	103Y XL	10.5- 11.0 -11.5	9.8	7.8	28.0	711	12.3	313	1929	875	49	340	742	31.72


Wheel Diameter	Size	LS	Rim Width	Tread Depth (1/32")	Tread Depth (mm)	Diameter (inch)	Diameter (mm)	Section Width (inch)	Section Width (mm)	Max Load (lbs)	Max Load (kg)	Max Pressure (psi)	Max Pressure (kPa)	RPM	Weight (lbs)
----------------	------	----	-----------	---------------------	------------------	-----------------	---------------	----------------------	--------------------	----------------	---------------	--------------------	--------------------	-----	--------------



D7

ALL SEASON ULTRA HIGH PERFORMANCE TIRE

DELINTE
WE INVENT. YOU DRIVE.

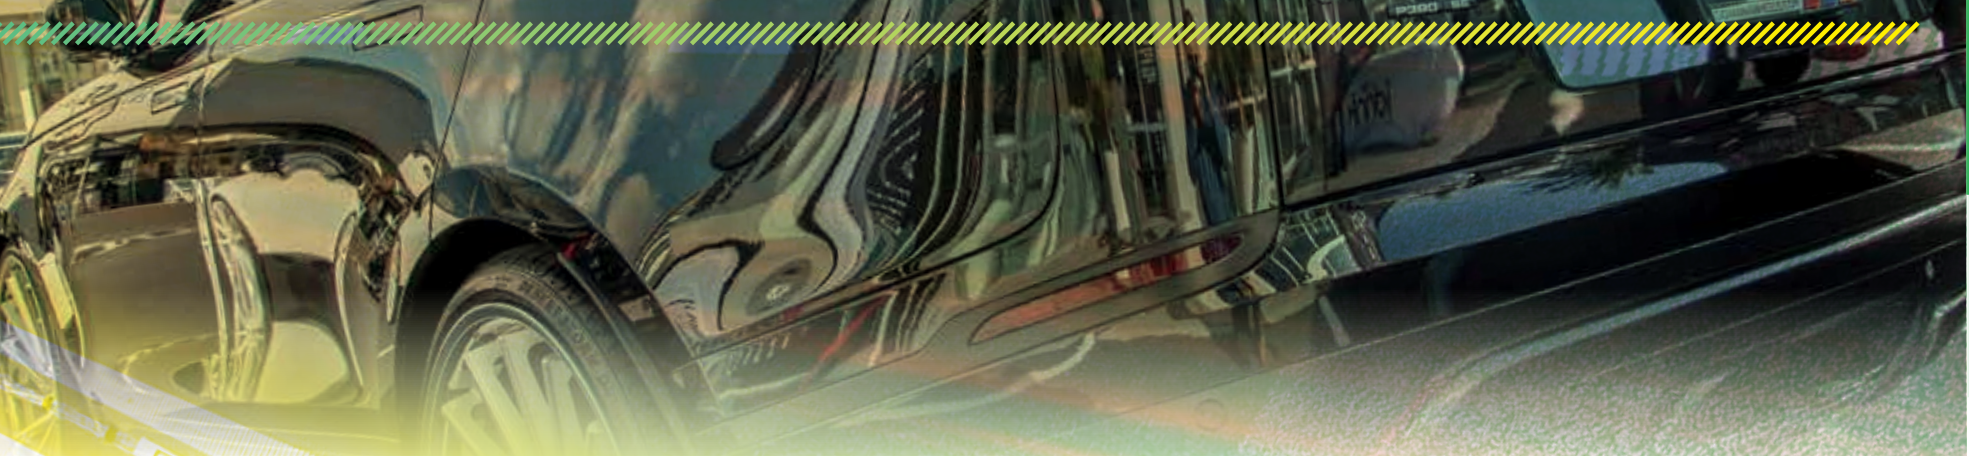

THE V, W AND Y SPEED RATED D8+ COMBINES
AGGRESSIVE GOOD LOOKS **WITH A CIVILIZED RIDE.**

Improved handling and cornering that discriminating SUV drivers demand! The D8+ has a unique, aggressive tread design that evacuates water and resists hydroplaning. Made with a special high silica compound for improved fuel economy and longer tire life.

D8+
TIRE DATA

FEATURES & BENEFITS

LARGER TIRE FOOTPRINT

Combine the D8+'s large contact patch with the tree-like central spine and you get all the grip, stability, high-speed controllability and confident cornering you could ask for.

GRIP-ENHANCING COMPOUND

High silica formula promotes fast braking and responsive handling, especially in wet conditions.

WET GRIP GROOVES

Twin longitudinal grooves with 3-D groove walls evacuate water and resist hydroplaning.

NOISE REDUCING DESIGN

Variable pitch patterns with 2-in-1 alignment reduce noise levels at high speeds.

EXTRA LOAD CAPACITY

The D8+ is a V, W and Y speed rated tire.




For Full Details Visit:
[DelinteTires.com/
Warranty](http://DelinteTires.com/Warranty)

Bold Designates
measuring rim width.

This data can be changed
by manufacturer without
prior notice.

Wheel Diameter	Size	LS	Rim Width	Tread Depth (1/32")	Tread Depth (mm)	Diameter (inch)	Diameter (mm)	Section Width (inch)	Section Width (mm)	Max Load (lbs)	Max Load (kg)	Max Pressure (psi)	Max Pressure (kPa)	RPM	Weight (lbs)
20	245/45ZR20	103W XL	7.5- 8.0 -9.0	9.8	7.8	28.7	728	9.6	243	1929	875	49	340	725	28.31
	245/45ZR20	108W	7.5- 8.0 -9.0	9.8	7.8	28.7	728	9.6	243	2205	1000	49	340	725	28.31
	275/40ZR20	106W XL	9.0- 9.5 -11.0	11.0	8.7	28.7	728	10.9	278	2094	950	49	340	725	31.82
	275/40ZR20	108W	9.0- 9.5 -11.0	11.0	8.7	28.7	728	10.9	278	2205	1000	49	340	725	31.82
	275/45R20	110V	8.5- 9.0 -10.5	11.0	8.7	29.8	756	10.7	273	2337	1060	49	340	698	34.64
	275/45R20	114V	8.5- 9.0 -10.5	11.0	8.7	29.8	756	10.7	273	2601	1180	49	340	698	34.64
	275/55R20	117V	7.5- 8.5 -9.5	11.1	8.8	31.9	810	11.2	284	2833	1285	49	340	651	39.22
22	315/35ZR20	110W	10.5- 11.0 -12.5	11.1	8.8	28.7	728	12.6	320	2337	1060	49	340	725	37.26
	265/35ZR22	102W	9.0- 9.5 -10.5	10.1	8.0	29.3	745	10.7	271	1874	850	49	340	708	31.75
	265/35ZR22	106W	9.0- 9.5 -10.5	10.1	8.0	29.3	745	10.7	271	2094	950	49	340	708	31.75
	265/40R22	106V XL	9.0- 9.5 -10.5	11.0	8.7	30.4	771	10.7	271	2094	950	49	340	684	35.60
	265/40ZR22	110V	9.0- 9.5 -10.5	11.0	8.7	30.4	771	10.7	271	2337	1060	49	340	684	35.60
	275/45R22	112V XL	8.5- 9.0 -10.5	10.2	8.1	31.8	807	10.7	273	2469	1120	49	340	654	38.68
	275/45R22	114V	8.5- 9.0 -10.5	10.2	8.1	31.8	807	10.7	273	2601	1180	49	340	654	38.68
	285/35ZR22	106W	9.5- 10.0 -11.0	11.0	8.7	29.9	759	11.4	290	2094	950	49	340	695	34.74
	285/35ZR22	110W	9.5- 10.0 -11.0	11.0	8.7	29.9	759	11.4	290	2337	1060	49	340	695	34.74
	285/45R22	114V XL	9.0- 9.5 -10.5	11.0	8.7	32.1	815	11.2	285	2601	1180	49	340	647	40.28
	285/45ZR22	116V	9.0- 9.5 -10.5	11.0	8.7	32.1	815	11.2	285	2756	1250	49	340	647	40.28
	305/40R22	114V	10.0- 11.0 -12.0	11.0	8.7	31.6	803	12.3	313	2601	1180	49	340	657	39.72
24	305/45R22	118V XL	9.5- 10.0 -11.5	11.0	8.7	32.8	833	11.9	303	2910	1320	49	340	633	43.64
	255/30ZR24	102W	8.5- 9.0 -9.5	10.1	8.0	30.1	764	10.2	260	1874	850	49	340	690	32.16
	255/30ZR24	97W	8.5- 9.0 -9.5	10.1	8.0	30.1	764	10.2	260	1609	730	49	340	690	32.16
	275/25ZR24	102W	10.0	11.1	8.8	29.4	748	11.1	283	1874	850	49	340	705	31.85
	275/25ZR24	95W	10.0	11.1	8.8	29.4	748	11.1	283	1521	690	49	340	705	31.85
	275/30ZR24	110W XL	9.5	11.0	8.7	30.6	776	10.9	278	2337	1060	49	340	680	33.91
	295/35R24	110V XL	10- 10.5 -11.5	11.0	8.7	32.1	816	11.9	301	2337	1060	49	340	646	39.78
26	295/35ZR24	114V	10- 10.5 -11.5	11.0	8.7	32.1	816	11.9	301	2601	1180	49	340	646	39.78
	305/35R24	112V	10.0- 11.0 -12.0	11.0	8.7	32.4	824	12.3	313	2469	1120	49	340	640	40.42
	305/35R24	114V	10.0- 11.0 -12.0	11.0	8.7	32.4	824	12.3	313	2601	1180	49	340	640	40.42
	255/30ZR26	105W	8.5- 9.0 -9.5	10.1	8.0	32.1	815	10.2	260	2039	925	49	340	647	35.88
	255/30ZR26	99W	8.5- 9.0 -9.5	10.1	8.0	32.1	815	10.2	260	1709	775	49	340	647	35.88
	275/25ZR26	102W	10.0	11.0	8.7	31.5	799	11.1	283	1874	850	49	340	660	35.11
	275/25ZR26	98XLW	10.0	11.0	8.7	31.5	799	11.1	283	1653	750	49	340	660	35.11
28	295/30ZR26	107W XL	10- 10.5 -11.0	11.1	8.8	33.0	839	11.9	301	2149	975	49	340	629	41.44
	295/30ZR26	114W	10- 10.5 -11.0	11.1	8.8	33.0	839	11.9	301	2601	1180	49	340	629	41.44
	305/30ZR26	109W	10.5- 11.0 -11.5	11.0	8.7	33.2	844	12.3	313	2271	1030	49	340	625	41.66
	305/30ZR26	116W	10.5- 11.0 -11.5	11.0	8.7	33.2	844	12.3	313	2756	1250	49	340	625	41.66
	275/25ZR28	110W XL	10.0	11.0	8.7	33.5	850	11.1	283	2337	1060	49	340	621	38.20
	275/25ZR28	114W	10.0	11.0	8.7	33.5	850	11.1	283	2601	1180	49	340	621	38.20
	295/25ZR28	103Y	10.0- 10.5 -11.0	11.1	8.8	33.8	859	11.9	301	1929	875	49	340	614	42.57
30	295/25ZR28	116Y	10.0- 10.5 -11.0	11.1	8.8	33.8	859	11.9	301	2756	1250	49	340	614	42.57
	275/20R30	112V XL	10.0	11.1	8.8	34.3	872	11.3	288	2469	1120	49	340	605	39.21
	275/20R30	114V	10.0	11.1	8.8	34.3	872	11.3	288			49	340		39.21
	275/25ZR30	108W XL	10.0	10.2	8.1	35.3	896	11.4	289	2205	1000	49	340	589	40.60
	275/25ZR30	114W	10.0	10.2	8.1	35.3	896	11.4	289	2601	1180	49	340	589	40.60
	305/25ZR32	108W XL	10.5- 11.0 -11.5	11.0	8.7	38.0	965	12.3	313	2205	1000	49	340	547	47.82
	305/25ZR32	114V	10.5- 11.0 -11.5	11.0	8.7	38.0	965	12.3	313			49	340		47.82

Wheel Diameter	Size	LS	Rim Width	Tread Depth (1/32")	Tread Depth (mm)	Diameter (inch)	Diameter (mm)	Section Width (inch)	Section Width (mm)	Max Load (lbs)	Max Load (kg)	Max Pressure (psi)	Max Pressure (kPa)	RPM	Weight (lbs)
----------------	------	----	-----------	---------------------	------------------	-----------------	---------------	----------------------	--------------------	----------------	---------------	--------------------	--------------------	-----	--------------

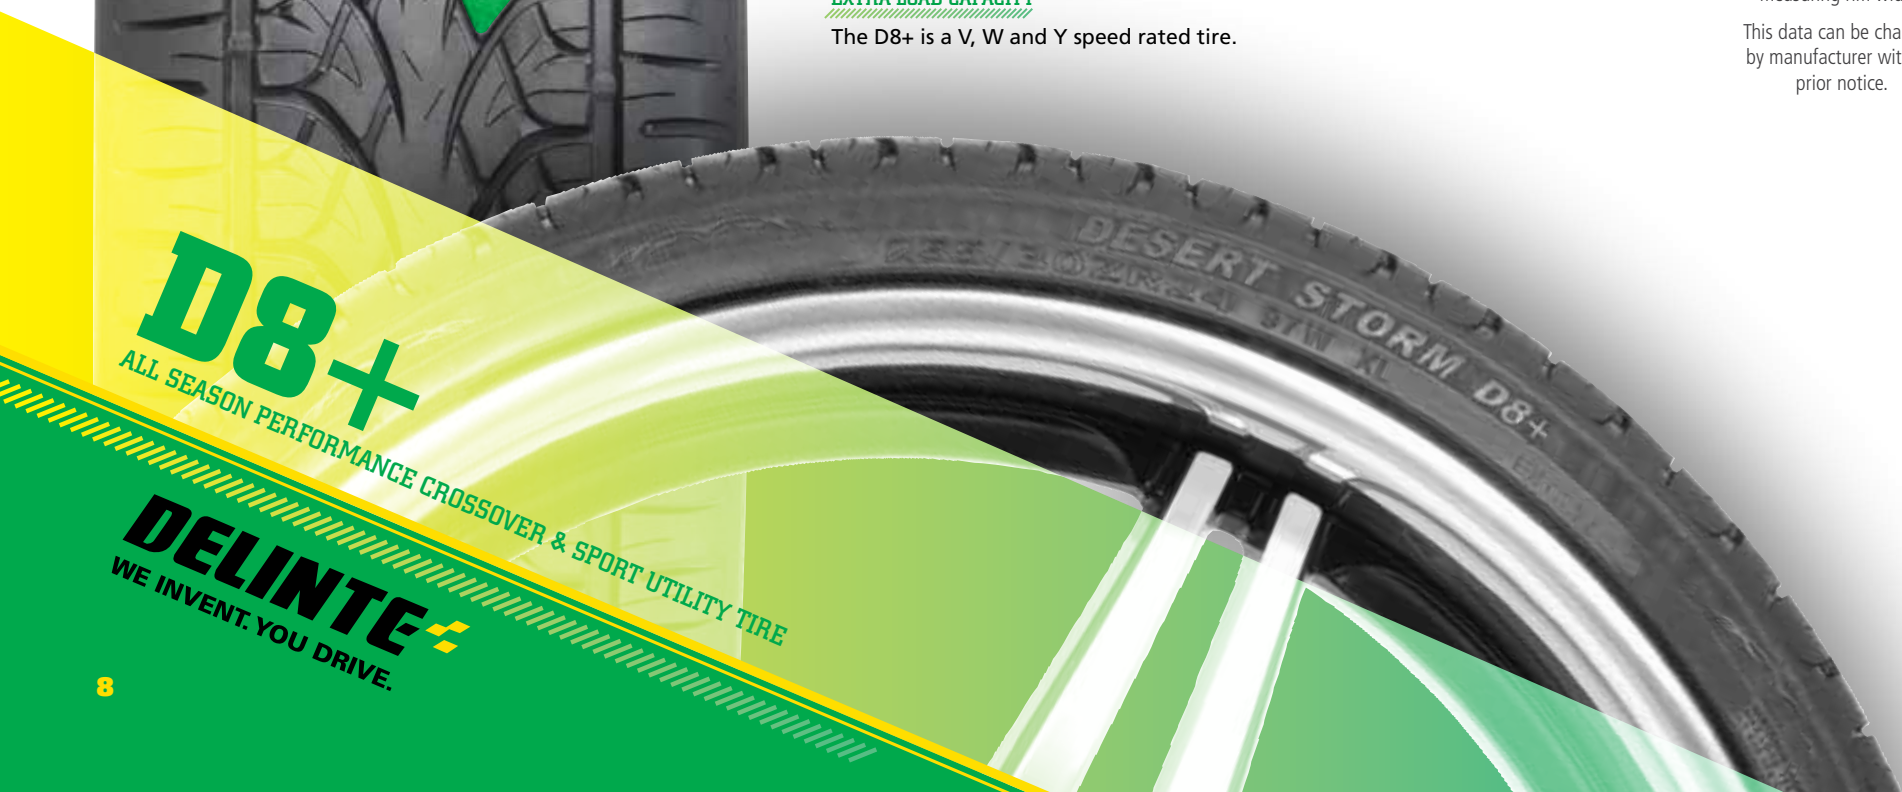

D8+

ALL SEASON PERFORMANCE CROSSOVER & SPORT UTILITY TIRE

DELINTE
WE INVENT. YOU DRIVE.



IMPROVED HIGHWAY STABILITY
IN BOTH WET AND DRY CONDITIONS.

T, H, V, and W Speed rated so you'll feel confident at highway velocity, the DH7 also features enhanced stability tread design and stylishly civilized good looks. You'll own the road.

DH7
TIRE DATA

FEATURES & BENEFITS

SOLID STABILITY RIB

The continuous center rib ensures straight-line driving stability with just enough siping to further improve high-speed performance.

WET TRACTION GROOVES

Four wide longitudinal grooves speed water evacuation for great handling and cornering on wet pavement.

GRIP OPTIMIZED GROOVES

The design of the DH7's lateral and longitudinal grooves delivers extra gripping ability, more control, and better braking performance.

STABLE SHOULDER DESIGN

The large shoulders give you the contact patch you need for sure cornering and stability.



For Full Details Visit:
[DelinteTires.com/
Warranty](https://DelinteTires.com/Warranty)

Bold Designates
measuring rim width.

This data can be changed
by manufacturer without
prior notice.

Wheel Diameter	Size	LS	Rim Width	Tread Depth (1/32")	Tread Depth (mm)	Diameter (inch)	Diameter (mm)	Section Width (inch)	Section Width (mm)	Max Load (lbs)	Max Load (kg)	Max Pressure (psi)	Max Pressure (kPa)	RPM	Weight (lbs)
16	215/70R16	100H	5.5- 6.5 -7.0	9.8	7.8	27.9	708	8.7	221	1764	800	44	300	745	24.43
	225/70R16	103H	6.0- 6.5 -7.5	9.8	7.8	28.4	722	9.0	228	1929	875	44	300	731	26.23
	225/70R16	103T	6.0- 6.5 -7.5	9.8	7.8	28.4	722	9.0	228	1929	875	44	300	731	26.23
	235/60R16	100H	6.5- 7.0 -8.5	9.8	7.8	27.1	688	9.4	240	1764	800	44	300	767	27.71
	235/60R16	100V	6.5- 7.0 -8.5	9.8	7.8	27.1	688	9.4	240	1764	800	44	300	767	27.71
	235/65R16	107H XL	6.5- 7.0 -8.5	9.8	7.8	28.0	712	9.4	240	2149	975	49	340	741	28.09
	235/70R16	106H	6.0- 7.0 -8.0	9.8	7.8	29.0	736	9.4	240	2094	950	44	300	717	28.68
	255/70R16	109H	6.5- 7.5 -8.5	10.2	8.1	30.1	764	10.2	260	2271	1030	44	300	690	33.33
17	265/70R16	112H	7.0- 8.0 -9.0	10.2	8.1	30.6	778	10.7	272	2469	1120	44	300	678	35.98
	225/60R17	99H	6.0- 6.5 -8.0	10.2	8.1	27.6	702	9.0	228	1709	775	44	300	751	25.00
	225/65R17	102H	6.0- 6.5 -8.0	9.8	7.8	28.5	724	9.0	228	1874	850	44	300	729	28.01
	235/55R17	103W XL	6.5- 7.5 -8.5	10.2	8.1	27.2	690	9.6	245	1929	875	49	340	765	26.37
	235/65R17	108H XL	6.5- 7.0 -8.5	9.8	7.8	29.1	738	9.4	240	2205	1000	49	340	715	29.48
	245/65R17	107H	7.0 -8.5	9.8	7.8	29.5	750	9.8	248	2149	975	44	300	703	31.39
	245/70R17	110H	6.5- 7.0 -8.0	10.2	8.1	30.6	776	9.8	248	2337	1060	44	300	680	34.67
	255/65R17	110H	7.0- 7.5 -9.0	9.8	7.8	30.1	764	10.2	260	2337	1060	44	300	690	33.75
18	255/70R17	112H	6.5- 7.5 -8.5	10.2	8.1	31.1	790	10.2	260	2469	1120	44	300	668	35.08
	265/65R17	112H	7.5- 8.0 -9.5	9.8	7.8	30.6	776	10.7	272	2469	1120	44	300	680	34.77
	265/70R17	115H	7.0- 8.0 -9.0	10.2	8.1	31.7	804	10.7	272	2679	1215	44	300	656	41.34
	235/50R18	101V XL	6.5- 7.5 -8.5	9.8	7.8	27.3	693	9.6	245	1819	825	49	340	761	26.62
	235/55R18	104V XL	6.5- 7.5 -8.5	9.8	7.8	28.1	715	9.6	245	1984	900	49	340	738	27.80
	235/60R18	107V XL	6.5- 7.0 -8.5	9.8	7.8	29.1	739	9.4	240	2149	975	49	340	714	30.46
	235/65R18	110H XL	6.5- 7.0 -8.5	9.8	7.8	30.0	763	9.4	240	2337	1060	49	340	691	31.29
	245/60R18	105V	7.0 -8.5	9.8	7.8	29.6	751	9.8	248	2039	925	44	300	702	31.72
	255/55R18	109W XL	7.0- 8.0 -9.0	9.8	7.8	29.0	737	10.4	265	2271	1030	49	340	716	32.23
	255/70R18	113H	6.5- 7.5 -8.5	10.2	8.1	32.1	815	10.2	260	2535	1150	44	300	647	37.57
	265/60R18	114H	7.5- 8.0 -9.5	9.8	7.8	30.5	775	10.7	272	2601	1180	49	340	681	36.05
	265/65R18	114H	7.5- 8.0 -9.5	9.8	7.8	31.5	801	10.7	272	2601	1180	44	300	659	38.02
	275/65R18	116H	7.5- 8.0 -9.5	9.8	7.8	32.1	815	11.0	279	2756	1250	44	300	647	38.23

Wheel Diameter	Size	LS	Rim Width	Tread Depth (1/32")	Tread Depth (mm)	Diameter (inch)	Diameter (mm)	Section Width (inch)	Section Width (mm)	Max Load (lbs)	Max Load (kg)	Max Pressure (psi)	Max Pressure (kPa)	RPM	Weight (lbs)
	215/70R16	100H	5.5- 6.5 -7.0	9.8	7.8	27.9	708	8.7	221	1764	800	44	300	745	24.43
	225/70R16	103H	6.0- 6.5 -7.5	9.8	7.8	28.4	722	9.0	228	1929	875	44	300	731	26.23
	225/70R16	103T	6.0- 6.5 -7.5	9.8	7.8	28.4	722	9.0	228	1929	875	44	300	731	26.23
	235/60R16	100H	6.5- 7.0 -8.5	9.8	7.8	27.1	688	9.4	240	1764	800	44	300	767	27.71
	235/60R16	100V	6.5- 7.0 -8.5	9.8	7.8	27.1	688	9.4	240	1764	800	44	300	767	27.71
	235/65R16	107H XL	6.5- 7.0 -8.5	9.8	7.8	28.0	712	9.4	240	2149	975	49	340	741	28.09
	235/70R16	106H	6.0- 7.0 -8.0	9.8	7.8	29.0	736	9.4	240	2094	950	44	300	717	28.68
	255/70R16	109H	6.5- 7.5 -8.5	10.2	8.1	30.1	764	10.2	260	2271	1030	44	300	690	33.33
	265/70R16	112H	7.0- 8.0 -9.0	10.2	8.1	30.6	778	10.7	272	2469	1120	44	300	678	35.98
	225/60R17	99H	6.0- 6.5 -8.0	10.2	8.1	27.6	702	9.0	228	1709	775	44	300	751	25.00
	225/65R17	102H	6.0- 6.5 -8.0	9.8	7.8	28.5	724	9.0	228	1874	850	44	300	729	28.01
	235/55R17	103W XL	6.5- 7.5 -8.5	10.2	8.1	27.2	690	9.6	245	1929	875	49	340	765	26.37
	235/65R17	108H XL	6.5- 7.0 -8.5	9.8	7.8	29.1	738	9.4	240	2205	1000	49	340	715	29.48
	245/65R17	107H	7.0 -8.5	9.8	7.8	29.5	750	9.8	248	2149	975	44	300	703	31.39
	245/70R17	110H	6.5- 7.0 -8.0	10.2	8.1	30.6	776	9.8	248	2337	1060	44	300	680	34.67
	255/65R17	110H	7.0- 7.5 -9.0	9.8	7.8	30.1	764	10.2	260	2337	1060	44	300	690	33.75
	255/70R17	112H	6.5- 7.5 -8.5	10.2	8.1	31.1	790	10.2	260	2469	1120	44	300	668	35.08
	265/65R17	112H	7.5- 8.0 -9.5	9.8	7.8	30.6	776	10.7	272	2469	1120	44	300	680	34.77
	265/70R17	115H	7.0- 8.0 -9.0	10.2	8.1	31.7	804	10.7	272	2679	1215	44	300	656	41.34
	235/50R18	101V XL	6.5- 7.5 -8.5	9.8	7.8	27.3	693	9.6	245	1819	825	49	340	761	26.62
	235/55R18	104V XL	6.5- 7.5 -8.5	9.8	7.8	28.1	715	9.6	245	1984	900	49	340	738	27.80
	235/60R18	107V XL	6.5- 7.0 -8.5	9.8	7.8	29.1	739	9.4	240	2149	975	49	340	714	30.46
	235/65R18	110H XL	6.5- 7.0 -8.5	9.8	7.8	30.0	763	9.4	240	2337	1060	49	340	691	31.29
	245/60R18	105V	7.0 -8.5	9.8	7.8	29.6	751	9.8	248	2039	925	44	300	702	31.72
	255/55R18	109W XL	7.0- 8.0 -9.0	9.8	7.8	29.0	737	10.4	265	2271	1030	49	340	716	32.23
	255/70R18	113H	6.5- 7.5 -8.5	10.2	8.1	32.1	815	10.2	260	2535	1150	44	300	647	37.57
	265/60R18	114H	7.5- 8.0 -9.5	9.8	7.8	30.5	775	10.7	272	2601	1180	49	340	681	36.05
	265/65R18	114H	7.5- 8.0 -9.5	9.8	7.8	31.5	801	10.7	272	2601	1180	44	300	659	38.02
	275/65R18	116H	7.5- 8.0 -9.5	9.8	7.8	32.1	815	11.0	279	2756	1250	44	300	647	38.23

DH7

ALL SEASON HIGHWAY CROSSOVER & SUV TIRE

DELINTE

WE INVENT. YOU DRIVE.



ALL SEASON **SUV/CUV/PERFORMANCE SEDAN TIRE**

Superb handling in wet and dry road conditions. Features a high UTQG treadwear rating to fit over 82 different fitment sizes!

DS8
TIRE DATA

FEATURES & BENEFITS

WET TRACTION GROOVES

Three wide longitudinal main grooves can evacuate water effectively at high speeds.

GRIP OPTIMIZED GROOVE

The wide angle groove enhances snow grip and evacuates water and snow.

SUPER STABLE SHOULDER

The big blocks outside enhance steering and handling performance on wet roads.

ENHANCED WET GRIP

The blocks inside are designed for wet and winter roads; the sipes can increase edges which can cut water film.



For Full Details Visit:
**DelinteTires.com/
Warranty**

Bold Designates
measuring rim width.

This data can be changed
by manufacturer without
prior notice.

DS8
ALL SEASON ULTRA HIGH PERFORMANCE TIRE
DELINTE
WE INVENT. YOU DRIVE.
DESERT STORM II

Wheel Diameter	Size	LS	Rim Width	Tread Depth (1/32")	Tread Depth (mm)	Diameter (inch)	Diameter (mm)	Section Width (inch)	Section Width (mm)	Max Load (lbs)	Max Load (kg)	Max Pressure (psi)	Max Pressure (kPa)	RPM	Weight (lbs)
18	235/45R18	98W XL	7.5- 8.0 -9.0	10.1	8.0	26.3	669	9.3	236	1653	750	49	340	789	24.52
	245/35R18	92W XL	8.0- 8.5 -9.5	10.1	8.0	24.8	629	9.8	248	1389	630	49	340	839	23.48
	245/40R18	97W XL	8.0- 8.5 -9.5	10.1	8.0	25.7	653	9.8	248	1609	730	49	340	808	24.36
	265/40R18	101Y XL	9.0- 9.5 -10.5	10.1	8.0	26.3	669	10.7	271	1819	825	49	340	789	28.29
	265/45R18	101V	8.5- 9.0 -10.0	10.1	8.0	27.4	695	10.5	266	1819	825	44	300	759	28.56
	285/35R18	101V XL	9.5- 10.0 -11.0	10.5	8.3	25.9	657	11.4	290	1819	825	49	340	803	28.51
19	225/55R19	99H	6.0- 7.0 -8.0	10.1	8.0	28.8	731	9.2	233	1709	775	44	300	722	29.01
	235/55R19	105V XL	6.5- 7.5 -8.5	10.1	8.0	29.2	741	9.6	245	2039	925	49	340	712	29.56
	245/55R19	103V	7.0- 7.5 -8.5	10.1	8.0	29.6	753	10.0	253	1929	875	44	300	701	30.68
	255/45R19	100Y	8.0- 8.5 -9.5	10.1	8.0	28.1	713	10.0	255	1764	800	44	300	740	28.18
	255/50R19	107Y XL	7.0- 8.0 -9.0	10.1	8.0	29.1	739	10.4	265	2149	975	49	340	714	31.41
	255/55R19	111V XL	7.0- 8.0 -9.0	10.1	8.0	30.0	763	10.4	265	2403	1090	49	340	691	33.32
	265/50R19	110V XL	7.5- 8.5 -9.5	10.1	8.0	29.5	749	10.9	277	2337	1060	49	340	704	34.47
	285/40R19	103Y	9.5- 10.0 -11.0	10.5	8.3	28.0	711	11.4	290	1929	875	44	300	742	33.55
	285/45R19	107Y XL	9.0- 9.5 -10.5	10.5	8.3	29.1	739	11.2	285	2149	975	44	300	714	32.61
	205/30R20	82W XL	6.5- 7.0 -7.5	10.1	8.0	24.9	632	8.6	218	1047	475	49	340	835	18.94
20	215/30R20	82W XL	7.0- 7.5 -8.5	10.1	8.0	25.1	638	9.0	228	1047	475	49	340	827	20.44
	235/55R20	104V XL	6.5- 7.5 -8.5	10.1	8.0	30.2	766	9.6	245	1984	900	49	340	689	31.73
	245/45R20	108W XL	7.5- 8.0 -9.0	10.1	8.0	28.7	728	9.6	243	2205	1000	49	340	725	28.31
	245/50R20	102V	7.0- 7.5 -8.5	10.1	8.0	29.7	754	10.0	253	1874	850	44	300	700	30.79
	255/50R20	109Y XL	7.0- 8.0 -9.0	10.1	8.0	30.1	764	10.4	265	2271	1030	49	340	690	34.12
	265/45R20	104V	8.5- 9.0 -10.0	10.1	8.0	29.4	746	10.5	266	1984	900	44	300	707	32.41
	265/45R20	108W	8.5- 9.0 -10.0	10.1	8.0	29.4	746	10.5	266	2205	1000	49	340	707	32.41
	265/50R20	111V XL	7.5- 8.5 -9.5	10.1	8.0	30.5	774	10.9	277	2403	1090	49	340	682	35.32
	275/40R20	108W XL	9.0- 9.5 -11.0	10.5	8.3	28.7	728	10.9	278	2205	1000	49	340	725	31.82
	275/45R20	114V XL	8.5- 9.0 -10.5	10.5	8.3	29.8	756	10.7	273	2601	1180	49	340	698	34.64
	275/50R20	113V XL	7.5- 8.5 -9.5	10.5	8.3	30.9	784	11.2	284	2535	1150	49	340	673	37.13
	275/55R20	117V XL	7.5- 8.5 -9.5	10.5	8.3	31.9	810	11.2	284	2833	1285	49	340	651	39.22
	275/60R20	115W	7.5- 8.0 -9.5	10.5	8.3	33.0	838	11.0	279	2679	1215	44	300	630	39.75
	295/40R20	108Y XL	10.0- 10.5 -11.5	10.5	8.3	29.3	744	11.9	301	2205	1000	49	340	709	37.29
21	315/35R20	110W XL	10.5- 11.0 -12.5	10.5	8.3	28.7	728	12.6	320	2337	1060	49	340	725	37.26
	245/35R21	96Y XL	8.0- 8.5 -9.5	10.1	8.0	27.8	705	9.8	248	1565	710	49	340	748	27.43
	245/40R21	100Y XL	8.0- 8.5 -9.5	10.1	8.0	28.7	729	9.8	248	1764	800	49	340	724	30.97
	245/45R21	107V XL	7.5- 8.0 -9.0	10.1	8.0	29.6	753	9.6	243	2149	975	49	340	701	31.37
	265/40R21	105Y XL	9.0- 9.5 -10.5	10.1	8.0	29.3	745	10.7	271	2039	925	49	340	708	34.36
	275/40R21	109V XL	9.0- 9.5 -11.0	10.5	8.3	29.6	753	10.9	278	2271	1030	49	340	701	34.79
	275/45R21	110Y XL	8.5- 9.0 -10.5	10.5	8.3	30.7	781	10.7	273	2337	1060	49	340	675	37.96
	285/30R21	100Y XL	9.5- 10.0 -10.5	10.1	8.0	27.8	705	11.4	290	1764	800	49	340	748	32.17
	285/35R21	108Y XL	9.5- 10.0 -11.0	10.5	8.3	28.9	733	11.4	290	2205	1000	49	340	720	34.35
	295/35R21	109Y XL	10.0- 10.5 -11.5	10.5	8.3	29.1	739	11.9	301	2271	1030	49	340	714	36.76
	295/40R21	111V XL	10.0- 10.5 -11.5	10.5	8.3	30.3	769	11.9	301	2403	1090	49	340	686	38.47
	325/30R21	110Y XL	11.0- 11.5 -12.0	10.5	8.3	28.7	729	13.0	331	2337	1060	49	340	724	37.59
	265/35R22	106V XL	9.0- 9.5 -10.5	10.1	8.0	29.3	745	10.7	271	2094	950	49	340	708	31.75
	265/40R22	110V XL	9.0- 9.5 -10.5	10.1	8.0	30.4	771	10.7	271	2337	1060	49	340	684	35.60
22	275/45R22	114V XL	8.5- 9.0 -10.5	10.5	8.3	31.8	807	10.7	273	2601	1180	49	340	654	38.68
	285/35R22	110V XL	9.5- 10.0 -11.0	10.5	8.3	29.9	759	11.4	290	2337	1060	49	340	695	34.74
	285/40R22	110V XL	9.5- 10.0 -11.0	10.5	8.3	31.0	787	11.4	290	2337	1060	49	340	670	37.61
	285/45R22	116V XL	9.0- 9.5 -10.5	10.5	8.3	32.1	815	11.2	285	2756	1250	49	340	647	40.28
	295/30R22	110V XL	10.0- 10.5 -11.0	10.5	8.3	29.0	737	11.9	301	2337	1060	49	340	716	32.83
	305/40R22	114V XL	10.0- 11.0 -12.0	10.5	8.3	31.6	803	12.3	313	2601	1180	49	340	657	39.72
	305/45R22	118V XL	9.5- 10.0 -11.5	10.5	8.3	32.8	833	11.9	303	2910	1320	49	340	633	43.64
	315/30R22	107Y XL	10.5- 11.0 -11.5	10.5	8.3	29.5	749	12.6	320	2149	975	49	340	704	38.34
	245/25R24	101V XL	8.5- 9.0 -9.5	10.1	8.0	28.8	732	9.8	248	1819	825	49	340	721	26.50
	245/30R24	103Y XL	8.0- 8.5 -9.0	10.1	8.0	28.8	732	9.8	248	1929	875	49	340	721	29.78
24	255/30R24	102V XL	8.5- 9.0 -9.5	10.1	8.0	30.1	764	10.2	260	1389	850	49	340	690	32.16
	275/25R24	102V XL	10.0	10.5	8.3	29.4	748	11.1	283	1874	850	49	340	705	31.85
	275/30R24	110V XL	9.0- 9.5 -10.0	11.3	9.0	30.6	776	10.9	278	2337	1060	49	340	680	33.91
	295/25R24	109Y XL	10.0- 10.5 -11.0	10.1	8.0	35.3	896	11.4	289	2271	1030	49	340	589	36.08
	295/35R24	114V XL	10.0- 10.5 -11.5	10.5	8.3	32.1	816	11.9	301	2601	1180	49	340	646	39.78
	305/35R24	114V XL	10.0- 11.0 -12.0	10.5	8.3	32.4	824	12.3	313	2601	1180	49	340	640	40.42
26	255/30R26	105V XL	8.5- 9.0 -9.5	10.1	8.0	32.1	815	10.2	260	2039	925	49	340	647	35.88
	275/25R26	102V XL	10.0	10.5	8.3	29.4	748	11.1	283	1874	850	49	340	705	35.11
	295/30R26	114V XL	10.0- 10.5 -11.0	10.5	8.3	33.0	838	11.9	301	2601	1180	49	340	630	41.44
	305/30R26	116V XL	10.5- 11.0 -11.5	10.5	8.3	33.2	844	12.3	313	2756	1250	49	340	625	41.66
28	275/25R28	114V XL	10.0	10.5	8.3	31.5	799	11.1	283	2601	1180	49	340	660	38.20
	295/25R28	116Y XL	10.0- 10.5 -11.0	10.1	8.0	33.8	859	11.9	301	2756	1250	49	340	614	42.57
30	275/20R30	114V XL	10.0	10.5	8.3	34.3	872	11.1	283	2601	1180	49	340	605	39.21
	275/25R30	114V XL	10.0	10.5	8.3	33.5	850	11.1	283	2601	1180	49	340	621	40.60
32	305/25R32	114V XL	10.5- 11.0 -11.5	10.5	8.3	38.0	965	12.3	313	2601	1180	49	340	547	47.82



THE ULTIMATE TIRE
FOR THE ULTIMATE OFF-ROAD CHALLENGE.

The best ratio of rubber and tread void effectively expels dirt from the tire under extreme road conditions.

DX9
TIRE DATA

FEATURES & BENEFITS

PUNCTURE GUARD TOUGHNESS

Three tough layers of polyester cord fabric and high strength steel belts guard against rock and debris punctures.

SUPER STABLE SHOULDER

The varying shapes of the shoulder blocks are optimized for improved handling and control on unpaved roads.

WETLAND OPTIMIZED GROOVES

Angled lateral and longitudinal groove structure promotes better drainage for improved braking and handling on wet, soggy ground.



Snow Service-Rated



HIGHER Carrying Capacity
Inflation Pressure

Bold Designates
measuring rim width.

This data can be changed
by manufacturer without
prior notice.

Wheel Diameter	Size	LS	PLY/Load Range	Rim Width	Tread Depth (1/32")	Tread Depth (mm)	Diameter (inch)	Diameter (mm)	Section Width (inch)	Section Width (mm)	Max Load (lbs)	Max Load (kg)	Max Load [Dual] (lbs)	Max Load [Dual] (kg)	Max Pressure (psi)	Max Pressure (kPa)	RPM	Weight (lbs)
15	33X12.50R15LT	6PR 108Q	6PR/LRC	8.5-10.0-11.0	19.8	15.7	32.8	832	12.5	318	2205	1000	/	/	35	250	634	58.86
	35X12.50R15LT	6PR 113Q	6PR/LRC	8.5-10.0-11.0	19.8	15.7	34.8	883	12.5	318	2535	1150	/	/	35	250	597	63.10
16	LT245/75R16	108/104Q	6PR/LRC	6.5-7.0-8.0	18.3	14.5	30.5	774	9.8	248	2205	1000	2006	910	50	350	682	43.13
	LT285/75R16	116/113Q	6PR/LRC	7.5-8.0-9.0	19.5	15.5	32.8	834	11.3	286	2755	1250	2535	1150	50	350	633	56.47
	LT285/75R16	126/123S	10PR/LRE	7.5-8.0-9.0	19.5	15.5	32.8	834	11.3	286	3750	1700	3415	1550	80	550	633	56.01
	LT305/70R16	124/121S	10PR/LRE	8.0-9.0-9.5	19.5	15.5	32.8	834	12.2	311	3525	1600	3195	1450	65	450	633	59.01
17	35x12.50R17LT	10PR 121Q	10PR/LRE	8.5-10.0-11.0	19.8	15.7	34.8	883	12.5	318	3195	1450	/	/	65	450	597	65.85
	LT285/70R17	121/118Q	10PR/LRE	7.5-8.5-9.0	19.5	15.5	32.8	832	11.5	292	3195	1450	2910	1320	80	550	634	56.19
18	33X12.50R18LT	10PR 118Q	10PR/LRE	8.5-10.0-11.0	19.8	15.7	32.8	832	12.5	318	2910	1320	/	/	65	450	634	61.44
	35X12.50R18LT	10PR 123Q	10PR/LRE	8.5-10.0-11.0	19.8	15.7	34.8	883	12.5	318	3415	1550	/	/	65	450	597	67.44
	LT285/65R18	10PR 125/122Q	10PR/LRE	8.0-8.5-10.0	19.8	15.7	32.8	833	11.5	292	3640	1650	3305	1500	80	550	633	57.30
20	33X12.50R20LT	10PR 114Q	10PR/LRE	8.5-10.0-11.0	19.4	15.4	32.8	832	12.5	318	2600	1180	/	/	65	450	634	60.16
	35X12.50R20LT	10PR 121Q	10PR/LRE	8.5-10.0-11.0	19.8	15.7	34.8	883	12.5	318	3195	1450	/	/	65	450	597	64.90
	37X13.50R20LT	129R	12PR/LRF	8.5-11.0	19.5	15.5	36.5	928	13.6	345	4080	1850	/	/	80	550	568	73.81
	LT275/60R20	123/120S	10PR/LRE	7.5-8.0-9.5	19.5	15.5	33.0	838	11.0	279	3415	1550	3085	1400	80	550	630	57.55
22	33X12.50R22LT	123R	12PR/LRF	8.5-10.0-11.0	19.5	15.5	32.5	826	12.5	318	3415	1550	/	/	80	550	639	61.62
	37X13.50R22LT	129Q	12PR/LRF	8.5-11.0	19.5	15.5	36.5	928	13.6	345	4080	1850	/	/	80	550	568	77.39
	LT325/50R22	122S	10PR/LRE	9.0-10.0-12.0	19.5	15.5	34.8	885	13.2	336	3305	1500	/	/	65	450	596	70.44
24	35X13.50R24LT	126Q	12PR/LRF	8.5-11.0	19.5	15.5	34.8	883	13.6	345	3750	1700	/	/	80	550	597	72.89
	37X13.50R24LT	129Q	12PR/LRF	8.5-11.0	19.5	15.5	36.5	928	13.6	345	4080	1850	/	/	80	550	568	76.81

Wheel Diameter	Size	LS	PLY/Load Range	Rim Width	Tread Depth (1/32")	Tread Depth (mm)	Diameter (inch)	Diameter (mm)	Section Width (inch)	Section Width (mm)	Max Load (lbs)	Max Load (kg)	Max Load [Dual] (lbs)	Max Load [Dual] (kg)	Max Pressure (psi)	Max Pressure (kPa)	RPM	Weight (lbs)
15	33X12.50R15LT	6PR 108Q	6PR/LRC	8.5-10.0-11.0	19.8	15.7	32.8	832	12.5	318	2205	1000	/	/	35	250	634	58.86
	35X12.50R15LT	6PR 113Q	6PR/LRC	8.5-10.0-11.0	19.8	15.7	34.8	883	12.5	318	2535	1150	/	/	35	250	597	63.10
16	LT245/75R16	108/104Q	6PR/LRC	6.5-7.0-8.0	18.3	14.5	30.5	774	9.8	248	2205	1000	2006	910	50	350	682	43.13
	LT285/75R16	116/113Q	6PR/LRC	7.5-8.0-9.0	19.5	15.5	32.8	834	11.3	286	2755	1250	2535	1150	50	350	633	56.47
	LT285/75R16	126/123S	10PR/LRE	7.5-8.0-9.0	19.5	15.5	32.8	834	11.3	286	3750	1700	3415	1550	80	550	633	56.01
	LT305/70R16	124/121S	10PR/LRE	8.0-9.0-9.5	19.5	15.5	32.8	834	12.2	311	3525	1600	3195	1450	65	450	633	59.01
17	35x12.50R17LT	10PR 121Q	10PR/LRE	8.5-10.0-11.0	19.8	15.7	34.8	883	12.5	318	3195	1450	/	/	65	450	597	65.85
	LT285/70R17	121/118Q	10PR/LRE	7.5-8.5-9.0	19.5	15.5	32.8	832	11.5	292	3195	1450	2910	1320	80	550	634	56.19
18	33X12.50R18LT	10PR 118Q	10PR/LRE	8.5-10.0-11.0	19.8	15.7	32.8	832	12.5	318	2910	1320	/	/	65	450	634	61.44
	35X12.50R18LT	10PR 123Q	10PR/LRE	8.5-10.0-11.0	19.8	15.7	34.8	883	12.5	318	3415	1550	/	/	65	450	597	67.44
	LT285/65R18	10PR 125/122Q	10PR/LRE	8.0-8.5-10.0	19.8	15.7	32.8	833	11.5	292	3640	1650	3305	1500	80	550	633	57.30
20	33X12.50R20LT	10PR 114Q	10PR/LRE	8.5-10.0-11.0	19.4	15.4	32.8	832	12.5	318	2600	1180	/	/	65	450	634	60.16
	35X12.50R20LT	10PR 121Q	10PR/LRE	8.5-10.0-11.0	19.8	15.7	34.8	883	12.5	318	3195	1450	/	/	65	450	597	64.90
	37X13.50R20LT	129R	12PR/LRF	8.5-11.0	19.5	15.5	36.5	928	13.6	345	4080	1850	/	/	80	550	568	73.81
	LT275/60R20	123/120S	10PR/LRE	7.5-8.0-9.5	19.5	15.5	33.0	838	11.0	279	3415	1550	3085	1400	80	550	630	57.55
22	33X12.50R22LT	123R	12PR/LRF	8.5-10.0-11.0	19.5	15.5	32.5	826	12.5	318	3415	1550	/	/	80	550	639	61.62
	37X13.50R22LT	129Q	12PR/LRF	8.5-11.0	19.5	15.5	36.5	928	13.6	345	4080	1850	/	/	80	550	568	77.39
	LT325/50R22	122S	10PR/LRE	9.0-10.0-12.0	19.5	15.5	34.8	885	13.2	336	3305	1500	/	/	65	450	596	70.44
24	35X13.50R24LT	126Q	12PR/LRF	8.5-11.0	19.5	15.5	34.8	883	13.6	345	3750	1700	/	/	80	550	597	72.89
	37X13.50R24LT	129Q	12PR/LRF	8.5-11.0	19.5	15.5	36.5	928	13.6	345	4080	1850	/	/	80	550	568	76.81



DX9
MUD-TERRAIN TIRE
BANDIT M/T

DELINTE
WE INVENT. YOU DRIVE.



AN ALL-TERRAIN TIRE DESIGNED FOR OVERALL TRACTION
AND HANDLING IN **DIFFICULT OR RUGGED TERRAIN.**

Five-pattern block design is engineered to expel water and reduce noise under a variety of road and terrain conditions.

DX10
TIRE DATA

FEATURES & BENEFITS

HIGH STABILITY TREAD CORNERS

The special cutting corner on all borders of the groove pattern makes it more dimensional while promoting driving stability and comfort.

ZIG-ZAG MIDDLE BLOCK

The zig-zag middle tread pattern reduces noise while the sloped corner repels rocks and improves earth-grasping performance.

SPECIAL SHOULDER SHAPE

The bench-shaped shoulder design provides excellent earth-grasping action for stable high-speed turns under dry and wet road conditions.



For Full Details Visit:
[DelinteTires.com/
Warranty](http://DelinteTires.com/Warranty)



Snow Service-Rated



HIGHER Carrying Capacity
Inflation Pressure

Bold Designates
measuring rim width.

This data can be changed
by manufacturer without
prior notice.

NOW AVAILABLE
FOR 24" WHEELS.

DX10
ALL-TERRAIN TIRE
BANDIT A/T
DELINTE
WE INVENT. YOU DRIVE.

Wheel Diameter	Size	LS	PLY/Load Range	Rim Width	Tread Depth (1/32")	Tread Depth (mm)	Diameter (inch)	Diameter (mm)	Section Width (inch)	Section Width (mm)	Max Load (lbs)	Max Load (kg)	Max Load [Dual] (lbs)	Max Load [Dual] (kg)	Max Pressure (psi)	Max Pressure (kPa)	RPM	UTQG	Weight (lbs)
15	215/75R15	100T	/	5.5-6.0-7.0	13.1	10.4	27.7	703	8.5	216	1765	800	1610	730	44	300	750	500/A/A	27.80
	31X10.50R15LT	6PR 109S	6PR/LRC	7.0-8.5-9.0	16.1	12.8	30.5	775	10.6	268	2270	1030	/	/	50	350	681	/	41.66
	LT235/75R15	6PR 104/101S	6PR/LRC	6.0-6.5-7.0	14.1	11.2	28.9	733	9.3	235	1985	900	1820	825	50	350	720	/	36.40
	LT235/75R15	8PR 110/107S	8PR/LRD	6.0-6.5-7.0	14.1	11.2	28.9	733	9.3	235	2335	1060	2150	975	65	450	720	/	36.40
16	245/70R16	107H	/	6.5-7.0-8.0	13.1	10.4	29.5	750	9.8	248	2149	975	/	/	44	300	703	500/A/A	34.69
	LT215/85R16	115/112S	10PR/LRE	5.5-6.0-7.0	14.1	11.2	30.4	772	8.5	216	2680	1215	2470	1120	80	550	683	/	37.04
	LT225/75R16	115/112S	10PR/LRE	6.0-7.0	14.1	11.2	29.3	744	8.8	223	2680	1215	2470	1120	80	550	709	/	36.85
	LT235/70R16 LRC	104/101S	6PR/LRC	6.0-7.0-7.5	14.1	11.2	29.0	736	9.4	240	1985	900	1820	825	50	350	717	/	37.72
	LT235/85R16	120/116Q	10PR/LRE	6.0-6.5-7.5	14.1	11.2	31.7	806	9.3	235	3042	1380	2778	1260	80	550	655	/	42.36
	LT245/75R16	120/116S	10PR/LRE	6.5-7.0-8.0	16.1	12.8	30.5	774	9.8	248	3042	1380	2778	1260	80	550	682	/	41.30
	LT265/70R16	121/118S	10PR/LRE	7.0-8.0-8.5	16.1	12.8	30.6	778	10.7	272	3195	1450	2910	1320	80	550	678	/	45.06
	LT265/75R16	123/120S	10PR/LRE	7.0-7.5-8.0	16.1	12.8	31.7	804	10.5	267	3415	1550	3085	1400	80	550	656	/	46.27
	LT285/75R16	126/123S	10PR/LRE	7.5-8.0-9.0	17.3	13.7	32.8	834	11.3	286	3750	1700	3415	1550	80	550	633	/	54.19
	245/70R16	111S		6.5-7.0-8.0	12.6	10.0	29.5	750	9.8	248	2403	1090	/	/	49	340	703	500/A/A	36.60
	LT305/70R16	124/121S	10PR/LRE	8.0-9.0-9.5	15.7	12.5	32.8	834	12.2	311	3525	1600	3195	1450	65	450	633	/	54.88
	LT315/75R16	127/124S	10PR/LRE	8.0-8.5-11.0	15.7	12.5	34.6	878	12.3	313	3860	1750	3525	1600	65	450	601	/	59.13
17	LT235/80R17	120/117S	10PR/LRE	6.0-6.5-7.5	14.1	11.2	31.8	808	9.3	235	3085	1400	2835	1285	80	550	653	/	41.14
	LT245/70R17	119/116S	10PR/LRE	6.5-7.0-8.0	16.1	12.8	30.6	776	9.8	248	3000	1360	2755	1250	80	550	680	/	41.58
	LT245/75R17	121/118S	10PR/LRE	6.5-7.0-7.5	16.1	12.8	31.5	800	9.8	248	3195	1450	2910	1320	80	550	659	/	43.67
	LT265/70R17	121/118S	10PR/LRE	7.0-8.0-8.5	16.1	12.8	31.7	804	10.7	272	3195	1450	2910	1320	80	550	656	/	46.69
	LT285/70R17	121/118Q	10PR/LRE	7.5-8.5-9.0	17.3	13.7	32.8	832	11.5	292	3195	1450	2910	1320	80	550	634	/	55.23
	275/65R17	115V		7.5-8.0-9.5	16.1	12.8	31.1	790	11.0	279	2679	1215	/	/	44	300	668	500/A/A	42.09
	LT305/65R17	121/118S	10PR/LRE	8.5-9.0-11.0	15.7	12.5	32.6	828	12.2	311	3195	1450	2910	1320	65	450	637	/	60.56
	LT315/70R17	121/118S	10PR/LRE	8.0-9.5-11.0	15.7	12.5	34.4	874	12.7	323	3195	1450	2910	1320	65	450	604	/	62.68
	LT265/70R18	124/121S	10PR/LRE	7.0-8.0-9.0	16.1	12.8	32.6	829	10.7	272	3525	1600	3195	1450	80	550	636	/	49.06
	LT275/65R18	123/120S	10PR/LRE	7.5-8.0-9.0	16.1	12.8	32.1	815	11.0	279	3415	1550	3085	1400	80	550	647	/	49.45
	LT275/70R18	125/122S	10PR/LRE	7.0-8.0-8.5	16.1	12.8	33.2	843	11.0	279	3640	1650	3305	1500	80	550	626	/	50.09
	LT285/65R18	125/122R	10PR/LRE	8.0-8.5-10.0	15.7	12.5	32.6	827	11.5	292	3640	1650	3305	1500	80	550	638	/	53.78
18	LT285/65R18	125/122T	10PR/LRE	8.0-8.5-10.0	17.3	13.7	32.6	827	11.5	292	3640	1650	3305	1500	80	550	638	/	0.00
	LT305/60R18	121/118S	10PR/LRE	8.5-9.0-11.0	15.7	12.5	32.4	823	12.2	311	3195	1450	2910	1320	65	450	641	/	53.01
	LT305/70R18	126/123S	10PR/LRE	8.5-9.0-10.0	15.7	12.5	34.8	885	12.2	311	3750	1700	3415	1550	65	450	596	/	58.91
	LT325/65R18	127/124S	10PR/LRE	9.0-9.5-12.0	15.7	12.5	34.6	879	13.0	331	3860	1750	3525	1600	65	450	600	/	58.40
	LT265/60R20	121/118S	10PR/LRE	7.5-8.0-9.5	16.1	12.8	32.5	826	10.7	272	3195	1450	2910	1320	80	550	639	/	48.46
	LT275/65R20	126/123S	10PR/LRE	7.5-8.0-9.5	16.1	12.8	34.1	866	11.0	279	3750	1700	3415	1550	80	550	609	/	54.33
	LT285/60R20	125/122S	10PR/LRE	8.0-8.5-10.0	17.3	13.7	33.5	850	11.5	292	3640	1650	3305	1500	80	550	621	/	54.04
	275/55R20	118H		7.5-8.5-9.5	12.6	10.0	31.9	810	11.2	284	2910	1320	/	/	49	340	651	500/A/A	43.21
	275/60R20	118H		7.5-8.0-9.5	12.6	10.0	33.0	838	11.0	279	2910	1320	/	/	49	340	630	500/A/A	45.31
	35X12.50R20LT	126R	12PR/LRF	8.5-10.0-11.0	15.7	12.5	34.5	877	12.5	318	3750	1700	/	/	80	550	602	/	63.05
	37X12.50R20LT	127R	12PR/LRF	8.5-10.0-11.0	15.7	12.5	36.5	928	12.5	318	3860	1750	/	/	80	550	568	/	66.61
	LT265/50R20	121/118S	10PR/LRE	7.5-8.5-9.5	15.7	12.5	30.5	774	10.9	277	3195	1450	2910	1320	80	550	682	/	48.09
	LT275/55R20	120/117S	10PR/LRE	7.5-8.5-9.5	15.7	12.5	31.9	810	11.2	284	3085	1400	2835	1285	80	550	651	/	50.99
20	LT275/60R20	123/120S	10PR/LRE	7.5-8.0-9.5	15.7	12.5	33.0	838	11.0	279	3415	1550	3085	1400	80	550	630	/	56.63
	LT285/55R20	122/119S	10PR/LRE	8.0-9.0-10.0	15.7	12.5	32.4	822	11.7	297	3305	1500	3000	1360	80	550	642	/	53.27
	LT305/55R20	121/118S	10PR/LRE	8.5-9.5-11.0	15.7	12.5	33.2	844	12.4	316	3195	1450	2910	1320	65	450	625	/	57.76
	LT325/60R20	126/123S	10PR/LRE	9.0-9.5-12.0	15.7	12.5	35.4	898	13.0	331	3750	1700	3415	1550	65	450	587	/	65.18
	285/45R22	116H		9.0-9.5-10.5	12.6	10.0	32.1	815	11.2	285	2756	1250	/	/	49	340	647	500/A/A	43.16
	33X12.50R22LT	123S	12PR/LRF	8.5-10.0-11.0	15.7	12.5	32.5	826	12.5	318	3415	1550	/	/	80	550	639	/	59.71
	35X12.50R22LT	126R	12PR/LRF	8.5-10.0-11.0	15.7	12.5	34.5	877	12.5	318	3750	1700	/	/	80	550	602	/	63.08
24	285/40R24	118H		9.5-10.0-11.0	13.1	10.4	33.0	838	11.4	290	2910	1320	/	/	49	340	630	500/A/A	45.38
Wheel Diameter	Size	LS	PLY/Load Range	Rim Width	Tread Depth (1/32")	Tread Depth (mm)	Diameter (inch)	Diameter (mm)	Section Width (inch)	Section Width (mm)	Max Load (lbs)	Max Load (kg)	Max Load [Dual] (lbs)	Max Load [Dual] (kg)	Max Pressure (psi)	Max Pressure (kPa)	RPM	UTQG	Weight (lbs)



THE PERFECT BALANCE OF
TRACTION, QUIET AND COMFORT.

A continuous center rib maintains straight driving stability and improved braking performance.

DX11
TIRE DATA

FEATURES & BENEFITS

NOISE-REDUCING SHOULDER

The closed shoulder design blocks noise from the middle of the tires for a quieter, more comfortable ride.

OPTIMAL MIDDLE PATTERN

The consistent middle pattern and uninterrupted closed shoulder design improves stability.

LONGITUDINAL TRACTION GROOVES

The longitudinal groove design is optimized for effective drainage, faster braking, improved acceleration and stable turning on wet terrain.



For Full Details Visit:
**DelinteTires.com/
Warranty**

Bold Designates
measuring rim width.

This data can be changed
by manufacturer without
prior notice.

Wheel Diameter	Size	LS	PLY/Load Range	Rim Width	Tread Depth (1/32")	Tread Depth (mm)	Diameter (inch)	Diameter (mm)	Section Width (inch)	Section Width (mm)	Max Load (lbs)	Max Load (kg)	Max Load [Dual] (lbs)	Max Load [Dual] (kg)	Max Pressure (psi)	Max Pressure (kPa)	RPM	UTQG	Weight (lbs)
16	LT215/85R16 LRE	115/112S	10PR/LRE	5.5- 6.0 -7.0	14.0	9.9	30.4	772	9.0	229	2680	1215	2470	1120	80	550	683	/	37.04
	LT225/75R16 LRE	115/112S	10PR/LRE	6.0 -7.0	14.0	9.9	29.3	744	8.8	223	2680	1215	2470	1120	80	550	709	/	36.85
	LT235/85R16 LRE	120/116S	10PR/LRE	6.0-6.5 -7.5	14.0	9.9	31.6	802	8.9	225	3042	1380	2778	1260	80	550	658	/	42.36
	LT245/75R16 LRE	120/116S	10PR/LRE	6.5-7.0 -8.0	14.0	10.7	30.5	774	9.8	248	3042	1380	2778	1260	80	550	682	/	41.30
	LT265/75R16 LRE	123/120S	10PR/LRE	7.0-7.5 -8.0	15.0	10.7	31.7	804	10.5	267	3415	1550	3085	1400	80	550	656	/	46.27
	215/70R16	100H	/	5.5-6.5-7.0	10.7	8.5	27.9	708	8.7	221	1763.66843	800	/	/	44	300	745	500/A/A	27.84
	225/70R16	103H	/	6.0-6.5-7.5	10.7	8.5	28.4	722	9.0	228	1929.012346	875	/	/	44	300	731	500/A/A	28.42
	235/65R16	107H	/	6.5-7.0-8.5	10.7	8.5	28.0	712	9.4	240	2149.470899	975	/	/	49	340	741	500/A/A	36.37
	235/70R16	106H	/	6.0-7.0-8.0	10.7	8.5	29.0	736	9.4	240	2094.356261	950	/	/	44	300	717	500/A/A	31.14
	245/70R16	107H	/	6.5-7.0-8.0	10.7	8.5	29.5	750	9.8	248	2149.470899	975	/	/	44	300	703	500/A/A	33.05
	255/70R16	109H	/	6.5-7.5-8.5	10.7	8.5	30.1	764	10.2	260	2270.723104	1030	/	/	44	300	690	500/A/A	27.30
	265/70R16	112H	/	7.0-8.0-9.0	10.7	8.5	30.6	778	10.7	272	2469.135802	1120	/	/	44	300	678	500/A/A	36.92
	LT235/80R17 LRE	120/117S	10PR/LRE	6.0-6.5 -7.5	14.0	9.9	31.8	808	9.3	235	3085	1400	2835	1285	80	550	653	/	41.14
	LT245/70R17 LRE	119/116S	10PR/LRE	6.5-7.0 -8.0	14.0	10.7	30.6	776	9.8	248	3000	1360	2755	1250	80	550	680	/	41.58
	LT245/75R17 LRE	121/118S	10PR/LRE	6.5-7.0 -7.5	14.0	10.7	31.5	800	9.8	248	3195	1450	2910	1320	80	550	659	/	43.67
	LT265/70R17 LRE	121/118S	10PR/LRE	7.0-8.0 -8.5	15.0	10.7	31.7	804	10.7	272	3195	1450	2910	1320	80	550	656	/	46.69
17	225/60R17	99H	/	6.0-6.5-8.0	10.7	8.5	27.6	702	9.0	228	1708.553792	775	/	/	44	300	751	500/A/A	25.30
	225/65R17	102H	/	6.0-6.5-8.0	10.7	8.5	28.5	724	9.0	228	1873.897707	850	/	/	44	300	729	500/A/A	28.64
	235/65R17	108H	/	6.5-7.0-8.5	10.7	8.5	29.1	738	9.4	240	2204.585538	1000	/	/	49	340	715	500/A/A	30.75
	245/65R17	107H	/	7.0-8.5	10.7	8.5	29.5	750	9.8	248	2149.470899	975	/	/	44	300	703	500/A/A	32.77
	245/70R17	110H	/	6.5-7.0-8.0	10.7	8.5	30.6	776	9.8	248	2336.86067	1060	/	/	44	300	680	500/A/A	35.12
	255/65R17	110H	/	7.0-7.5-9.0	10.7	8.5	30.1	764	10.2	260	2336.86067	1060	/	/	44	300	690	500/A/A	34.14
	255/70R17	112H	/	6.5-7.5-8.5	10.7	8.5	31.1	790	10.2	260	2469.135802	1120	/	/	44	300	668	500/A/A	35.42
	265/65R17	112H	/	7.5-8.0-9.5	10.7	8.5	30.6	776	10.7	272	2469.135802	1120	/	/	44	300	680	500/A/A	37.70
	265/70R17	115H	/	7.0-8.0-9.0	10.7	8.5	31.7	804	10.7	272	2678.571429	1215	/	/	44	300	656	500/A/A	38.06
	265/65R18	116H	/	7.5-8.0 -9.5	10.7	8.5	31.5	801	10.7	272	2756	1250	/	/	49	340	659	500/A/A	38.02
	275/65R18	118H	/	7.5-8.0 -9.5	11.2	8.9	32.1	815	11.0	279	2910	1320	/	/	49	340	647	500/A/A	38.23
	LT265/70R18 LRE	124/121S	10PR/LRE	7.0-8.0 -9.0	15.0	10.7	32.6	829	10.7	272	3525	1600	3195	1450	80	550	636	/	49.06
	LT275/65R18 LRE	123/120S	10PR/LRE	7.5-8.0 -9.0	16.0	11.5	32.1	815	11.0	279	3415	1550	3085	1400	80	550	647	/	49.45
	LT275/70R18 LRE	125/122S	10PR/LRE	7.0-8.0 -8.5	16.0	11.5	33.2	843	11.0	279	3640	1650	3305	1500	80	550	626	/	50.09
	235/55R18	104V	/	6.5-7.5-8.5	10.7	8.5	28.1	715	9.6	245	1984.126984	900	/	/	49	340	738	500/A/A	30.37
	235/60R18	107V	/	6.5-7.0-8.5	10.7	8.5	29.1	739	9.4	240	2149.470899	975	/	/	49	340	714	500/A/A	31.62
18	235/65R18	110H	/	6.5-7.0-8.5	10.7	8.5	30.0	763	9.4	240	2336.86067	1060	/	/	49	340	691	500/A/A	33.02
	245/60R18	105V	/	7.0-8.5	10.7	8.5	29.6	751	9.8	248	2039.241623	925	/	/	44	300	702	500/A/A	32.16
	255/55R18	109V	/	7.0-8.0-9.0	10.7	8.5	29.0	737	10.4	265	2270.723104	1030	/	/	49	340	716	500/A/A	31.48
	255/55ZR18	109W	/	7.0-8.0-9.0	10.7	8.5	29.0	737	10.4	265	2270.723104	1030	/	/	49	340	716	500/A/A	31.48
	255/70R18	113H	/	6.5-7.5-8.5	10.7	8.5	32.1	815	10.2	260	2535.273369	1150	/	/	44	300	647	500/A/A	38.39
	265/60R18	114H	/	7.5-8.0-9.5	10.7	8.5	30.5	775	10.7	272	2601.410935	1180	/	/	49	340	681	500/A/A	37.08
	275/55R20	117H	/	7.5-8.5 -9.5	11.2	8.9	31.9	810	11.2	284	2833	1285	/	/	49	340	651	500/A/A	39.22
	275/60R20	115H	/	7.5-8.0 -9.5	11.2	8.9	33.0	838	11.0	279	2679	1215	/	/	44	300	630	500/A/A	39.75
	LT265/60R20 LRE	121/118S	10PR/LRE	7.5-8.0 -9.5	16.0	10.7	32.5	826	10.7	272	3195	1450	2910	1320	80	550	639	/	48.46
	LT275/65R20 LRE	126/123S	10PR/LRE	7.5-8.0 -9.5	16.0	11.5	34.1	866	11.0	279	3750	1700	3415	1550	80	550	609	/	54.33
	LT285/60R20 LRE	125/122S	10PR/LRE	8.0-8.5 -10.0	14.5	11.5	33.5	850	11.5	292	3640	1650	3305	1500	80	550	621	/	54.04
	285/45R22	116H	/	9.0-9.5 -10.5	11.2	8.9	32.1	815	11.2	285	2756	1250	/	/	49	340	647	500/A/A	40.28
	275/45R22	114V	/	8.5-9.0-10.5	10.7	8.5	31.8	807	10.7	273	2601.410935	1180	/	/	49	340	654	500/A/A	39.02
	275/45R22	114V	/	8.5-9.0-10.5	10.7	8.5	31.8	807	10.7	273	2601.410935	1180	/	/	49	340	654	500/A/A	39.02
	275/45R22	114V	/	8.5-9.0-10.5	10.7	8.5	31.8	807	10.7	273	2601.410935	1180	/	/	49	340	654	500/A/A	39.02
	275/45R22	114V	/	8.5-9.0-10.5	10.7	8.5	31.8	807	10.7	273	2601.410935	1180	/	/	49	340	654	500/A/A	39.02
	275/45R22	114V	/	8.5-9.0-10.5	10.7	8.5	31.8	807	10.7	273	2601.410935	1180	/	/	49	340	654	500/A/A	39.02

Wheel Diameter	Size	LS	PLY/Load Range	Rim Width	Tread Depth (1/32")	Tread Depth (mm)	Diameter (inch)	Diameter (mm)	Section Width (inch)	Section Width (mm)	Max Load (lbs)	Max Load (kg)	Max Load [Dual] (lbs)	Max Load [Dual] (kg)	Max Pressure (psi)	Max Pressure (kPa)	RPM	UTQG	Weight (lbs)
22	285/45R22	116H	/	9.0-9.5-10.5	11.2	8.9	32.1	815	11.2	285	2756	1250	/	/	49	340	647	500/A/A	40.28
	275/45R22	114V	/	8.5-9.0-10.5	10.7	8.5	31.8	807	10.7	273	2601	1180	/	/	49	340	654	500/A/A	39.02
	275/45R22	114V	/	8.5-9.0-10.5	10.7	8.5	31.8	807	10.7	273	2601	1180	/	/	49	340	654	500/A/A	39.02
	275/45R22	114V	/	8.5-9.0-10.5	10.7	8.5	31.8	807	10.7	273	2601	1180	/	/	49	340	654	500/A/A	39.02
	275/45R22	114V	/	8.5-9.0-10.5	10.7	8.5	31.8	807	10.7	273	2601	1180	/	/	49	340	654	500/A/A	39.02
	275/45R22	114V	/	8.5-9.0-10.5	10.7	8.5	31.8	807	10.7	273	2601	1180	/	/	49	340	654	500/A/A	39.02
	275/45R22	114V	/	8.5-9.0-10.5	10.7	8.5	31.8	807	10.7	273	2601	1180	/	/	49	340	654	500/A/A	39.02
	275/45R22	114V	/	8.5-9.0-10.5	10.7	8.5	31.8	807	10.7	273	2601	1180	/	/	49	340	654	500/A/A	39.02
	275/45R22	114V	/	8.5-9.0-10.5	10.7	8.5	31.8	807	10.7	273	2601	1180	/	/	49	340	654	500/A/A	39.02
	275/45R22	114V	/	8.5-9.0-10.5	10.7	8.5	31.8	807	10.7	273	2601	1180	/	/	49	340	654	500/A/A	39.02
	275/45R22	114V	/	8.5-9.0-10.5	10.7	8.5	31.8	807	10.7	273	2601	1180	/	/	49	340	654	500/A/A	39.02

DelinteTires.com

305-621-5101

19

Utilizing a deep groove design and connecting bars between the tire blocks, the DX-12 provides maximum ground contact in any driving condition. This increases driving force and ensures the safety of drivers, while not sacrificing performance.

10x12

TOP-NOTCH PUNCTURE RESISTANCE AND WEAR RESISTANCE

ELITE OFF ROAD PERFORMANCE
Strong shoulder blocks enhance traction in muddy, sandy, or snowy conditions.

Strong shoulder blocks enhance traction in muddy, sandy, or snowy conditions.

AGGRESSIVE PATTERN DESIGN
Featuring a chisel hammer and aggressive block pattern design, the DX-12

Featuring a chisel hammer and aggressive block pattern design, the DX-12 provides outstanding grip and traction on off-road surfaces, as well as in poor driving conditions and weather.



This data can be changed
by manufacturer without
prior notice.

Wheel Diameter Size	LS	PLY/Load Range	Rim Width	Tread Depth (1/32")	Tread Depth (mm)	Diameter (inch)	Diameter (mm)	Section Width (inch)	Section Width (mm)	Max Load (lbs)	Max Load (kg)	Max Load [Dual] (lbs)	Max Load [Dual] (kg)	Max Pressure (psi)	Max Pressure (kPa)	RPM	UTQG	Weight (lbs)
16			7.5	10	2.5	26.0	660	10.5	267	2000	907	3000	1360	35	241	1000		36

DelinteTires.com 305-621-5101 **21**

DESIGN

BANDIT R/T
TERRAIN

DELINTE
WE INVENT. YOU DRIVE.



These "C" designated tires are designed for higher load carrying capacities. Fitments are available for a broad range of commercial vehicles.

DV2
TIRE DATA

COMPACT SHOULDER

THREE LONGITUDINAL GROOVES

HEAT-RELEASING SHOULDER

STAGGERED SIPINGS

Improved braking ability when carrying heavier loads.

This data can be changed
by manufacturer without
prior notice.


Wheel Diameter	Size	LS
Rim Width		
Tread Depth (1/32")		
Tread Depth (mm)		
Diameter (inch)		
Diameter (mm)		
Section Width (inch)		
Section Width (mm)		
Max Load (lbs)		
Max Load (kg)		
Max Load [Dual] (lbs)		
Max Load [Dual] (kg)		
Max Pressure (psi)		
Max Pressure (kPa)		
RPM		
Weight (lbs)		

DelinTeTires.com 305-621-5101 **23**



DV2
COMMERCIAL VAN TIRE

DELINTE
WE INVENT. YOU DRIVE.

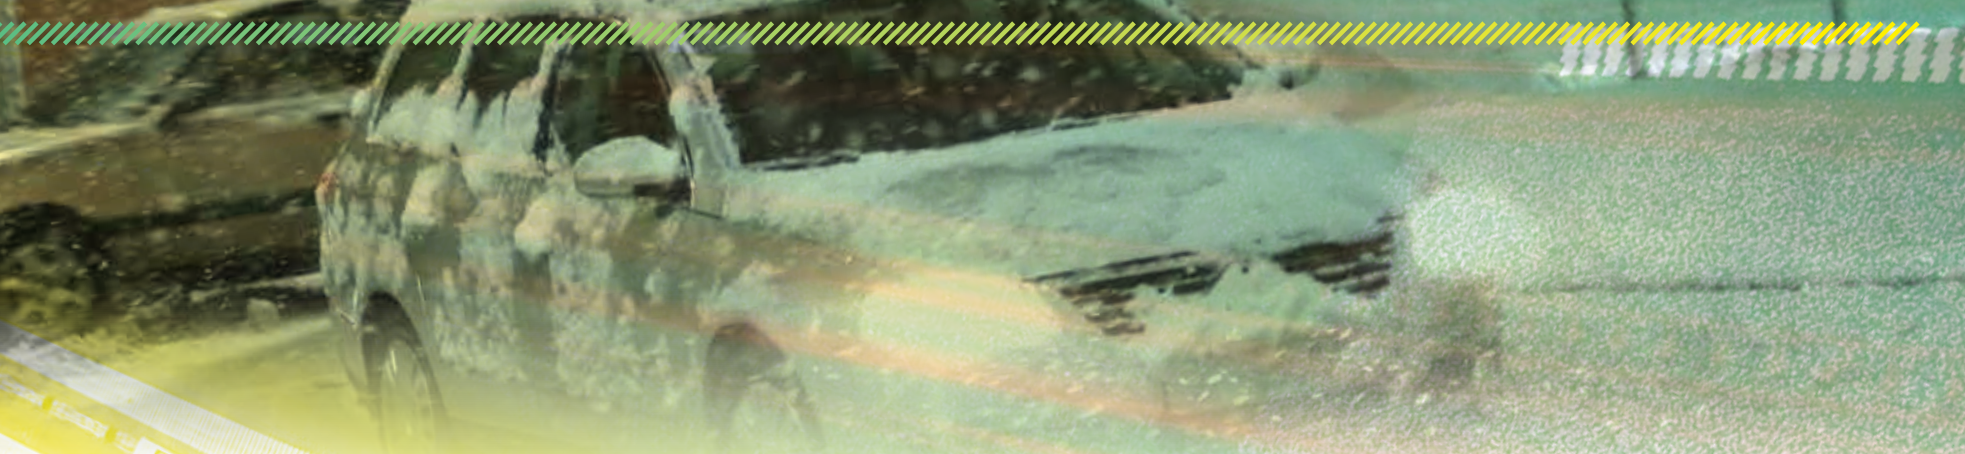

DESIGNED FOR ANY SEASON,
AND ALL TYPES OF WEATHER.

The AW5's tread compound and pattern are specifically designed to deliver high performance all year round, in any type of weather. Numerous biting edges provide increased traction in wet, snowy, or icy conditions. Pattern blocks within contain high-density waves of stereoscopic sipes, which allows the tire to maintain block rigidity and enhances both control and performance.

AW5
TIRE DATA

FEATURES & BENEFITS

BIG PATTERN OUTSIDE BLOCK DESIGN

Increased rigidity is provided, increasing control and elevating performance.

QUIET RIDE PITCH ALIGNMENT

Road noise caused by resonance is heavily reduced, due to computer optimized tread pattern pitches.

INSIDE MULTIPLE CROSS PATTERN DESIGN

Allows the tire to absorb more snow, making the trapped snow stronger. This provides the tire with enhanced traction and grip on icy roads and winter conditions.

WIDE LONGITUDINAL DRAINAGE GROOVES

Designed for peak performance in the rain and snow, due to the three wide longitudinal drainage grooves which channel road water out from underneath the tire.



MILE WARRANTY
+ROAD HAZARD

For Full Details Visit:
[DelinteTires.com/
Warranty](http://DelinteTires.com/Warranty)



Snow Service-Rated

Bold Designates
measuring rim width.

This data can be changed
by manufacturer without
prior notice.

Wheel Diameter	Size	LS	Rim Width	Tread Depth (1/32")	Tread Depth (mm)	Diameter (inch)	Diameter (mm)	Section Width (inch)	Section Width (mm)	Max Load (lbs)	Max Load (kg)	Max Pressure (psi)	Max Pressure (kPa)	RPM	UTQG	Weight (lbs)
13	165/70R13	79T	4.50B-5.00B-5.50B	10.7	8.5	22.1	562	6.7	170	963	437	44	300	939	360/A/A	13.78
	175/70R13	82T	4.50B-5.00B-5.50B	10.7	8.5	22.7	576	7.0	177	1047	475	44	300	916	360/A/A	15.21
	155/65R14	75T	4.5-5.0	10.7	8.5	22.0	558	6.2	157	853	387	44	300	945	360/A/A	13.23
	165/60R14	75H	4.5-5.0-5.5	10.7	8.5	21.8	554	6.7	170	853	387	44	300	952	500/A/A	13.84
14	165/65R14	79T	4.5-5.0-5.5	10.7	8.5	22.4	570	6.7	170	963	437	44	300	926	360/A/A	14.12
	165/70R14	81T	4.5-5.0-5.5	10.7	8.5	23.1	588	6.7	170	1019	462	44	300	897	360/A/A	14.64
	165/70R14	85T XL	4.5-5.0-5.5	10.7	8.5	23.1	588	6.7	170	1135	515	49	340	897	360/A/A	14.64
	175/70R14	88T XL	4.5-5.0-5.5	10.7	8.5	23.7	602	7.0	177	1235	560	49	340	876	360/A/A	15.86
	175/65R14	82T	5.0-5.5	10.7	8.5	23.0	584	7.0	177	1047	475	44	300	903	360/A/A	15.00
	185/60R14	82H	5.0-5.5-6.0	10.7	8.5	22.8	578	7.4	189	1047	475	44	300	913	360/A/A	15.79
	185/55R14	80T	5.5-6.0-6.5	10.7	8.5	22.0	560	7.6	194	992	450	44	300	942	360/A/A	15.79
	175/65R15	84H	5.0-5.5	10.5	8.3	24.0	609	7.0	177	1102	500	44	300	866	360/A/A	16.54
15	175/65R15	88H XL	5.0-5.5	10.5	8.3	24.0	609	7.0	177	1235	560	49	340	866	360/A/A	16.54
	185/60R15	88H XL	5.0-5.5-6.0	10.7	8.5	23.7	603	7.4	189	1235	560	49	340	875	360/A/A	17.10
	185/65R15	88H	5.0-5.5-6.0	10.7	8.5	24.4	621	7.4	189	1235	560	44	300	850	360/A/A	17.64
	185/55R15	82H	5.5-6.0-6.5	10.7	8.5	23.0	585	7.6	194	1047	475	44	300	902	360/A/A	17.55
	185/55R15	86H XL	5.5-6.0-6.5	10.7	8.5	23.0	585	7.6	194	1168	530	49	340	902	360/A/A	17.55
	195/50R15	82V	5.5-6.0-6.5	10.7	8.5	22.7	577	7.9	201	1047	475	44	300	914	360/A/A	17.28
	195/55R15	85H	5.5-6.0-6.5	10.7	8.5	23.4	595	7.9	201	1135	515	44	300	887	360/A/A	17.99
	195/60R15	88H	5.5-6.0-6.5	10.7	8.5	24.2	615	7.9	201	1235	560	44	300	858	360/A/A	18.25
	195/65R15	91H	5.5-6.0-6.5	10.7	8.5	25.0	635	7.9	201	1356	615	44	300	831	360/A/A	19.03
	195/55R16	87H	5.5-6.0-6.5	10.7	8.5	24.4	620	7.9	201	1201	545	44	300	851	360/A/A	19.04
16	205/60R16	96H XL	5.5-6.0-6.5	10.7	8.5	25.7	652	8.2	209	1565	710	49	340	809	360/A/A	20.06
	205/55R16	91V	6.0-6.5-7.0	10.7	8.5	24.9	632	8.4	214	1356	615	44	300	835	360/A/A	20.19
	215/60R16	99V	6.0-6.5-7.0	10.7	8.5	26.1	664	8.7	221	1709	775	49	340	794	360/A/A	22.33
	215/65R16	102V	6.0-6.5-7.0	10.7	8.5	27.0	686	8.7	221	1874	850	49	340	769	360/A/A	23.25
	215/55R16	97V XL	6.5-7.0-7.5	10.7	8.5	25.3	642	8.9	226	1609	730	49	340	822	360/A/A	21.37
17	205/50R17	93V	6.0-6.5-7.0	10.7	8.5	25.1	638	8.4	214	1433	650	49	340	827	360/A/A	20.56
	205/55R17	95V	6.0-6.5-7.0	10.7	8.5	25.9	658	8.4	214	1521	690	49	340	802	500/A/A	22.53
	215/55R17	98V	6.5-7.0-7.5	10.7	8.5	26.3	668	8.9	226	1653	750	49	340	790	360/A/A	22.92
	225/50R17	98V	6.5-7.0-7.5	10.7	8.5	25.9	658	9.2	233	1653	750	49	340	802	360/A/A	23.20
	225/55R17	101V	6.5-7.0-7.5	10.7	8.5	26.8	680	9.2	233	1819	825	49	340	776	360/A/A	25.46
	225/45R17	94V XL	7.0-7.5-8.0	10.5	8.3	25.0	634	8.9	225	1477	670	49	340	832	360/A/A	21.00
	235/45R17	97V	7.5-8.0-8.5	10.7	8.5	25.4	644	9.3	236	1609	730	49	340	819	360/A/A	23.24
	235/45ZR17	97V XL	7.5-8.0-8.5	10.7	8.5	25.4	644	9.3	236	1609	730	49	340	819	360/A/A	23.24
18	235/60R18	107V	6.5-7.0-7.5	10.7	8.5	29.1	739	9.4	240	2149	975	49	340	714	360/A/A	30.46
	235/50R18	101V	7.0-7.5-8.0	10.7	8.5	27.3	693	9.6	245	1819	825	49	340	761	360/A/A	26.62
	255/55R18	109V	7.5-8.0-8.5	10.7	8.5	29.0	737	10.4	265	2271	1030	49	340	716	360/A/A	32.23

Wheel Diameter	Size	LS	Rim Width	Tread Depth (1/32")	Tread Depth (mm)	Diameter (inch)	Diameter (mm)	Section Width (inch)	Section Width (mm)	Max Load (lbs)	Max Load (kg)	Max Pressure (psi)	Max Pressure (kPa)	RPM	UTQG	Weight (lbs)
----------------	------	----	-----------	---------------------	------------------	-----------------	---------------	----------------------	--------------------	----------------	---------------	--------------------	--------------------	-----	------	--------------

AW5

ALL WEATHER PASSENGER CAR RADIAL TIRE

DELINTE
WE INVENT. YOU DRIVE.



TAILORED FOR PEAK PERFORMANCE IN ANY WEATHER
WITH EXCLUSIVE ALL SEASON TREAD DESIGN.

The AW5 Van's tread compound and pattern are specifically designed to deliver high performance all year round, in any type of weather. Numerous biting edges provide increased traction in wet, snowy, or icy conditions. Pattern blocks within contain high-density waves of stereoscopic sipes, which allows the tire to maintain block rigidity and enhances both control and performance.

AW5 VAN
TIRE DATA



FEATURES & BENEFITS

BIG PATTERN OUTSIDE BLOCK DESIGN

Increased rigidity is provided, increasing control and stability, as well as elevating performance.

WIDE LONGITUDINAL DRAINAGE GROOVES

Designed for peak performance in the rain and snow, due to the three wide longitudinal drainage grooves which channel road water out from underneath the tire.

ANTI-SLIP MICROGROOVE DESIGN

The central pattern surface contains microgrooves, allowing for increase grip and road holding by force, due to increased contact between tire and the road.

DEEP-GROOVE DESIGN

Tire durability and life mileage are extended thanks to full depth grooves.



Snow Service-Rated

Bold Designates measuring rim width.

This data can be changed by manufacturer without prior notice.

Wheel Diameter	Size	LS	Rim Width	Tread Depth (1/32")	Tread Depth (mm)	Diameter (inch)	Diameter (mm)	Section Width (inch)	Section Width (mm)	Max Load (lbs)	Max Load (kg)	Max Load [Dual] (lbs)	Max Load [Dual] (kg)	Max Pressure (psi)	Max Pressure (kPa)	RPM
15	195/70R15C	104/102R	5.5-6.0-6.5	12.0	9.5	25.8	655	7.9	201	1984	900	1874	850	65	450	805
	215/70R15C	109/107R	6.0-6.5-7.0	11.6	9.2	26.9	683	8.7	221	2271	1030	2149	975	65	450	772
	225/70R15C	112/110S	6.0-6.5-7.0	12.1	9.6	27.4	697	9.0	228	2469	1120	2337	1060	65	450	757
16	195/65R16C	104/102R	5.5-6.0-6.5	12.0	9.5	26.0	660	7.9	201	1984	900	1874	850	69	475	799
	205/65R16C	107/105T	5.5-6.0-6.5	12.0	9.5	26.5	672	8.2	209	2149	975	2039	925	69	475	785
	215/65R16C	109/107T	6.0-6.5-7.0	12.0	9.5	27.0	686	8.7	221	2271	1030	2149	975	69	475	769
	225/65R16C	112/110S	6.0-6.5-7.0	12.1	9.6	27.5	698	9.0	228	2469	1120	2337	1060	69	475	756
	235/65R16C	115/113R	6.5-7.0-7.5	12.2	9.7	28.0	712	9.4	240	2679	1215	2535	1150	69	475	741
	195/75R16C	107/105R	5.0-5.5-6.0	12.0	9.5	27.5	698	7.7	196	2149	975	2039	925	69	475	756
	205/75R16C	110/108T	5.0-5.5-6.0	12.0	9.5	28.1	714	8.0	203	2337	1060	2205	1000	69	475	739



AW5 VAN
ALL WEATHER RADIAL TIRE

DELINTE
WE INVENT. YOU DRIVE.

SENTURY TIRE

WE'RE ROLLING!

Sentury Tire USA continues to evolve into a major multi-brand tire manufacturer. All brands offer a complete line-up of passenger, light truck, high performance, off-road and SUV/CUV tires.

Headquartered in Miami, Florida and with distribution points across the USA, Century Tire's regional sales representatives provide timely support and customer care for our distributor/dealer network. With a future manufacturing presence in the USA, Century Tire USA will continue to provide the outstanding fill rates our customers have come to expect.

Sentury Tire USA's parent company, Qingdao Century Tire Co., Ltd., is a global tire company with a presence in more than 150 countries and regions worldwide.

SenturyTireUSA.com

3121 NW 125 Street

Miami, FL 33167

Phone: 305.621.5101

Fax: 305.624.7881

The marks, slogans and logos appearing herein are the property of Century Tire USA and/or its affiliates. ©Century Tire USA, 2019. All rights reserved. DL*CG*2019v1

Visit our YouTube channel for all the latest videos from individual products to The SEMA Show, Video Shoots, and our State of the Art Fully Automated Factory.



Follow us on Instagram and Facebook for the most current feed and our tire installs on today's most popular applications.

DELINTE
WE INVENT. YOU DRIVE.